



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic Part Number	LMV321/LMV358/LMV324
▶ Overseas Part Number	LMV321/LMV358/LMV324
▶ Equivalent Part Number	LMV321/LMV358/LMV324



EV is the abbreviation of name EVVO

Low-Power rail-to-rail Operational Amplifier

Description

LMV321 (single channel) is a rail-to-rail input, output voltage feedback, low power consumption operational amplifier. It has wide input common mode voltage and output swing. The minimum working voltage can be up to 2.1V, and the maximum working voltage is recommended to be 5.5V. Used as power amplifier in all kinds of pocket or portable stereo radio recorders.

LMV321 has the following characteristics: Can provide 1MHz gain bandwidth product. It has an extremely low input bias current (about 10pA TYP) and can be used for integration, photo diode amplifiers and piezoelectric sensors. The Rail to Rail input and output buffers are also used for specific IC designs in single power systems. Applications of this series of amplifiers include safety monitoring, portable devices, batteries and power supplies, supply control, signal processing and interfaces in low power sensor systems.

The LMV321 single is available in Green SC70-5 and SOT23-5 packages. The LMV358 dual is available in Green SOP-8 and TSSOP-8 packages. The LMV324 Quad is available in Green SOP-14 and TSSOP-14 packages.




Features

- Rail to rail input and output, typical 0.8mv Vos
- Gain bandwidth product 1MHz
- Low input bias current: 10pA (TYP)
- Low Power consumption
- 2.1V ~ 5.5V working voltage
- Low operating current: 45uA

Application

- ASIC input and output amplifier
- Sensor interface
- Piezoelectric sensing amplifier
- Battery-powered equipment
- The mobile communication
- Audio output

Pin Configuration

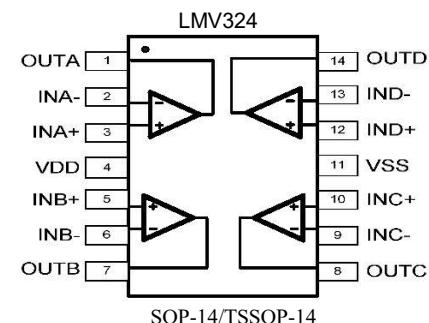

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$) Note1

Parameter	Symbol	Value	Units
Supply Voltage	V_{CC}	7.5	V
Common-mode Input Voltage	V_{ICR}	(-VS)-0.5~(+VS)0.5	V
Junction Temperature	T_J	150	$^\circ\text{C}$
Operating Temperature Range	T_{OPR}	-25 to +85	$^\circ\text{C}$
Lead Temperature (Soldering, 10 sec)	T_L	250	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-50 to 150	$^\circ\text{C}$







Note1: Exceeding the above limits may damage to the chip. The reliability of the device will also be affected if the device works under the limit conditions. Electrostatic discharge can also cause damage to chips, so it is suggested to take some preventive measures for integrated circuits. Failure to follow proper handling and installation can also cause damage. Precision LMV321 and other devices are more vulnerable to damage than ordinary devices in the case of tiny electrostatic, and small parameter changes may make the whole circuit performance substandard.





Electrical Characteristics

At $R_L = 100\text{k}\Omega$ connected to $V_s/2$, and $V_{OUT} = V_s/2, T_a=25^\circ\text{C}$, unless otherwise noted.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Offset Voltage	V_{OS}		--	0.8	5	mV
Input offset current	I_{OS}		--	10	--	pA
Input bias current	I_B		--	10	--	pA
Common-mode input voltage range	V_{CM}	$V_s=5.5\text{V}$	--	-0.1~5.6	--	V
Open-loop Gain	AOL	$V_o=0.1\text{V}$ to 4.9 V , $R_L=5\text{k}\Omega$	70	80	--	dB
		$V_o=0.035\text{V}$ to 4.96 V , $R_L=100\text{k}\Omega$	80	84	--	
Common Mode Rejection	CMRR	$V_{CM} = -0.1\text{V}\sim4\text{ V}$, $V_s=5.5\text{V}$	62	70	--	dB
		$V_{CM} = -0.1\text{V}\sim5.6\text{ V}$, $V_s=5.5\text{V}$	56	68	--	
Power Supply Rejection	PSRR	$V_{CM} = (-V_s)+0.5\text{ V}$, $V_s=2.5\text{V}\sim5.5\text{V}$	60	80	--	dB
Input offset voltage drift	$\Delta V_{OS}/\Delta T$		--	2.7	--	$\mu\text{V}/^\circ\text{C}$
Input voltage swing	V_I	$R_L= 100\text{k}\Omega$	--	8	--	mV
		$R_L=10\text{k}\Omega$	--	80	--	mV
Operating voltage range	V_W		2.1	--	5.5	mV
Output Current	I_O		20	25	--	mA
Quiescent Current	I_Q	$I_{OUT}=0$	--	45	60	μA
Slew Rate	SR	$G = +1$, 2V Output Step	--	0.52	--	$\text{V}/\mu\text{s}$
Gain Bandwidth Product	GBP	$CL = 100\text{pF}$	--	1	--	MHz
Equivalent Input Noise Voltage	eN	$f=1\text{KHz}$	--	27	--	$\text{nV}/\sqrt{\text{Hz}}$
		$f=10\text{KHz}$	--	20	--	

Typical Characteristic Curves

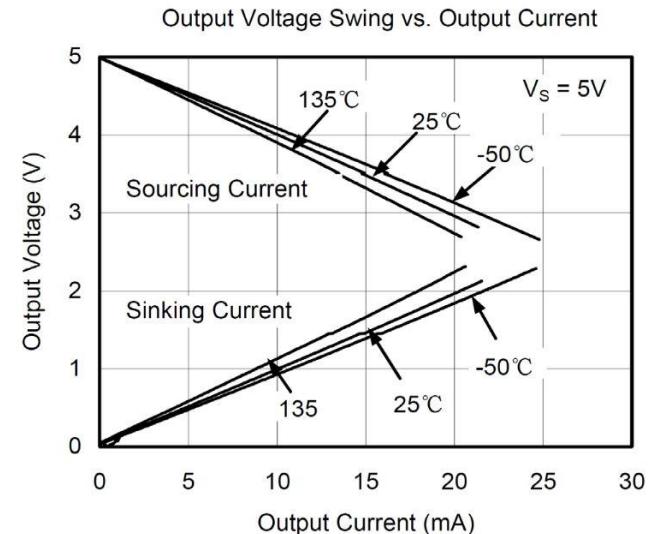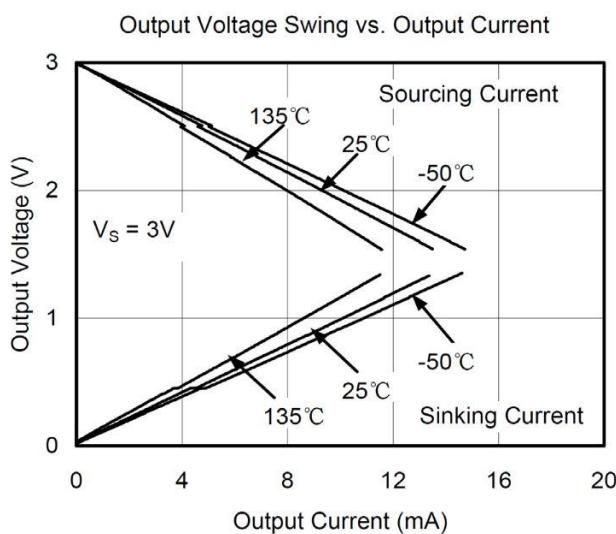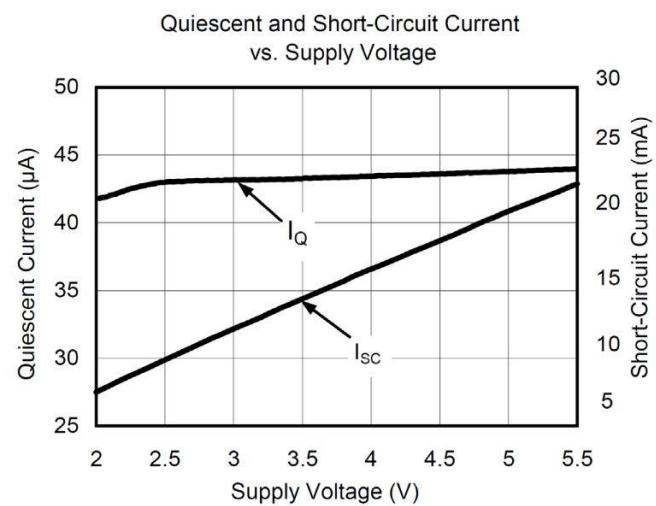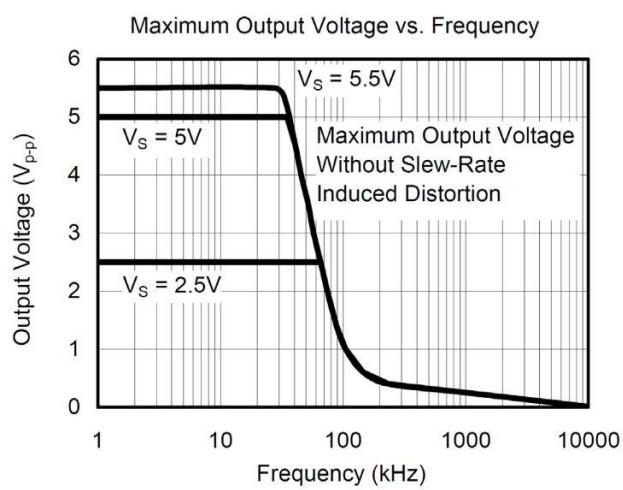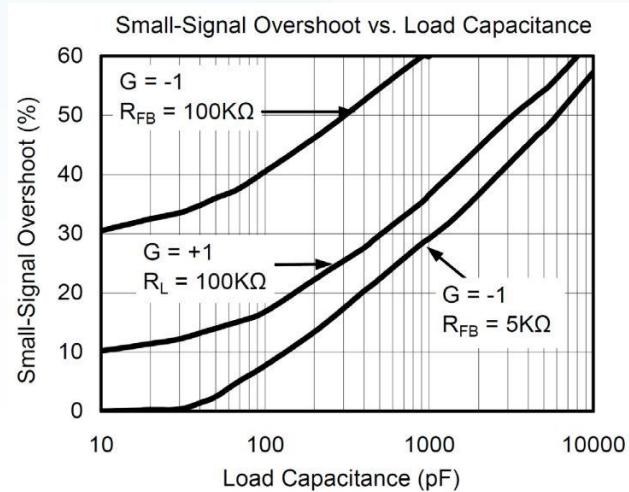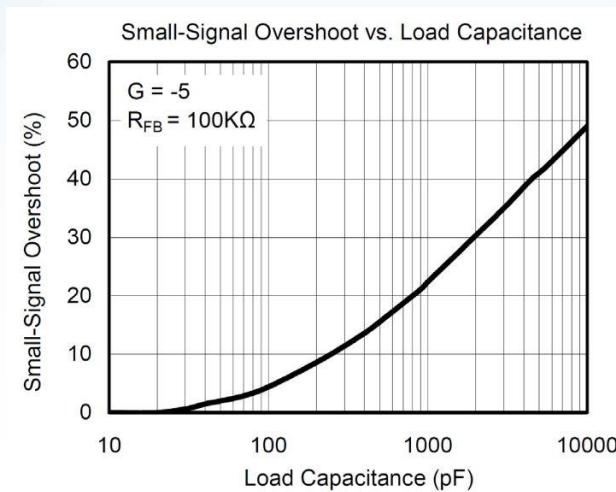

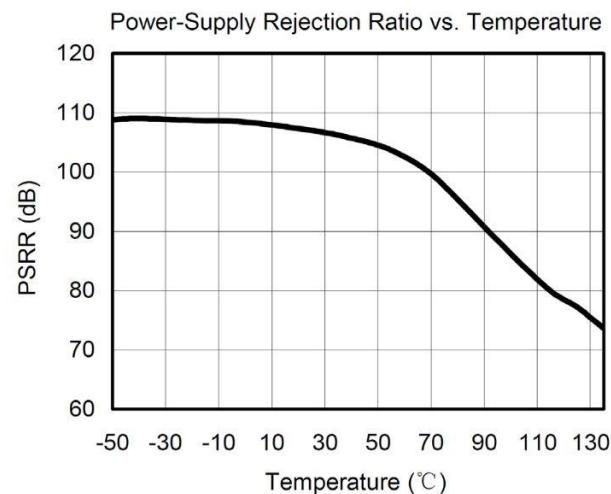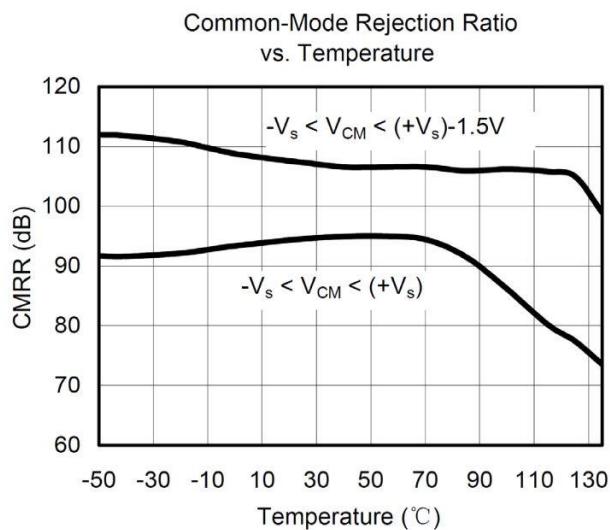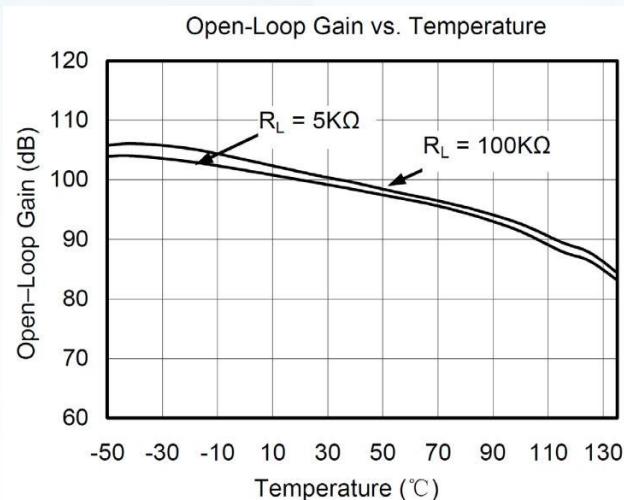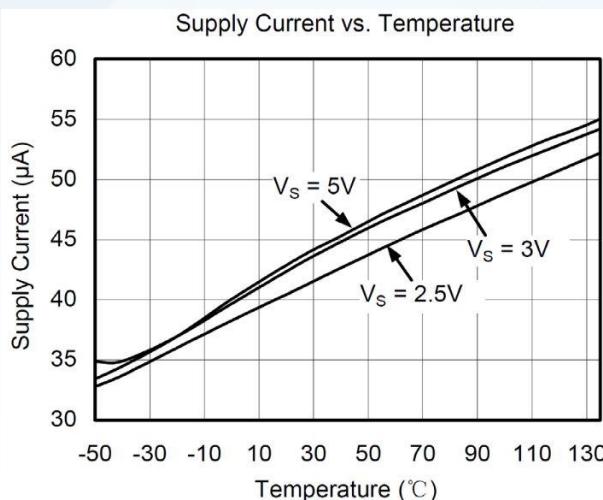


Typical applications

1.differential amplifier

As shown in the figure, if the resistance is equal, ($R_4 / R_3 = R_2 / R_1$), then the output $V_{OUT} =$


$$(V_p - V_n) \times R_2 / R_1 + V_{REF}$$

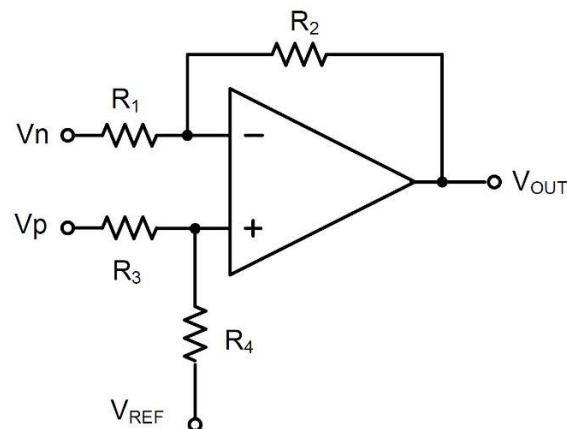

LMV321/LMV358/LMV324


2.instrumentation amplifier



The circuit in the figure above performs the same function, but the input is high impedance.

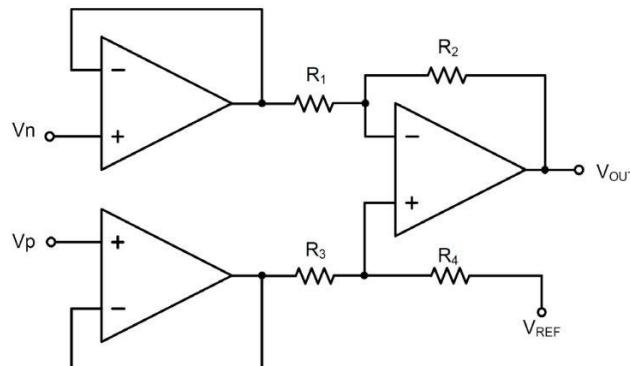



3.Low pass active filtering

The low-pass filter circuit shown here has a $(-R_2 / R_1)$ DC gain and -3db at a frequency of $1/2 \pi R_2 C$ corner. Make sure the filter is within the amplifier's bandwidth. Large feedback resistors are easily accompanied by parasitic capacitance at high speed, resulting in adverse effects such as oscillation. Keep the resistance value as low as possible and consider the appropriate output load.

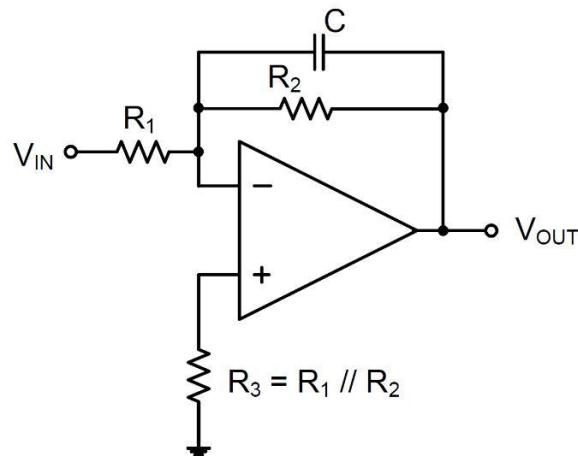

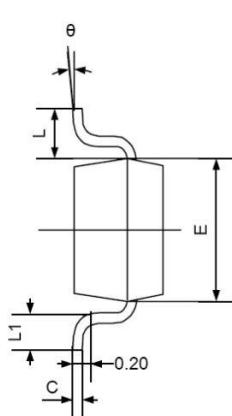
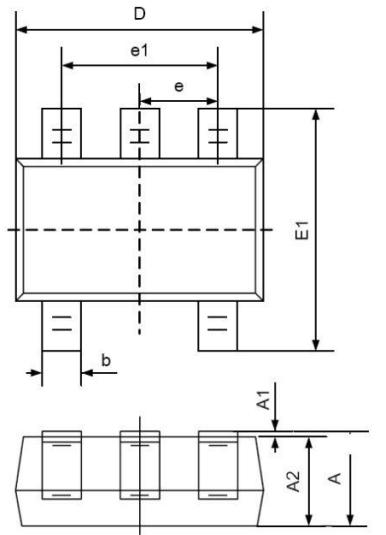
SC70-5

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
C	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650TYP		0.026TYP	
e1	1.200	1.400	0.047	0.055
L	0.525REF		0.021REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

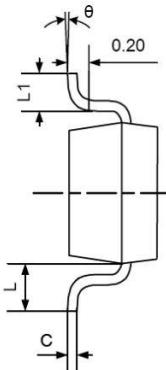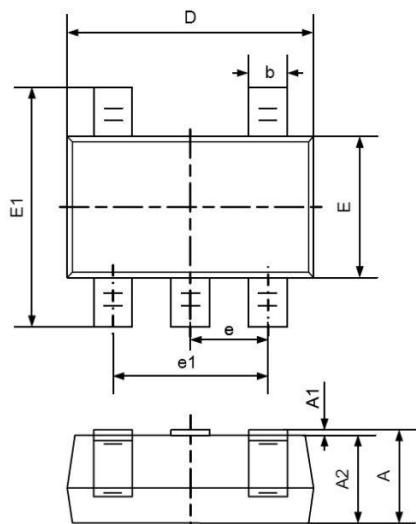SOT23-5



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
C	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.460	0.012	0.024
θ	0°	8°	0°	8°

SOP-8

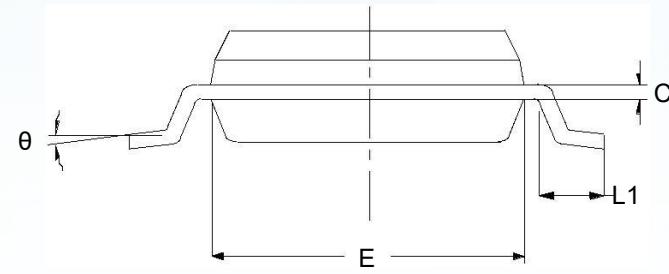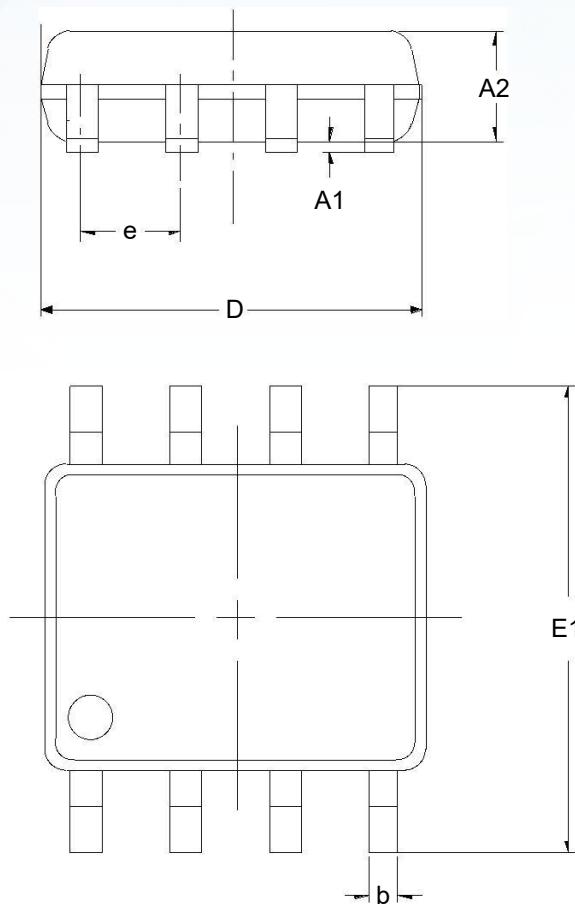


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
C	0.190	0.250	0.007	0.010
D	4.780	5.000	0.188	0.197
E	3.800	4.000	0.150	0.157
E1	5.800	6.300	0.228	0.248
e	1.270 TYP		0.050 TYP	
L1	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°


TSSOP-8

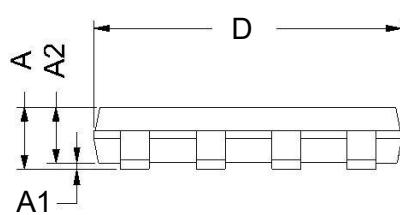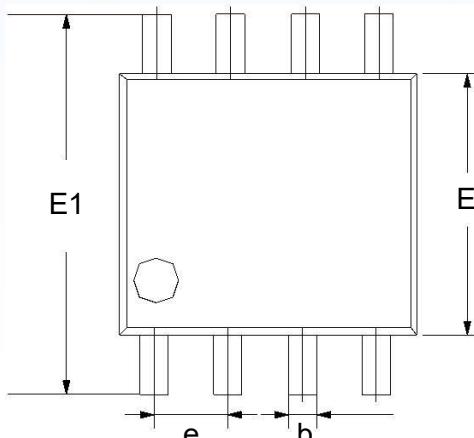

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.200	0.031	0.047
A1	0.000	0.200	0.000	0.008
A2	0.760	0.970	0.030	0.038
b	0.30 TYP		0.012 TYP	
C	0.15 TYP		0.006 TYP	
D	2.900	3.100	0.114	0.122
e	0.65 TYP		0.026	
E	2.900	3.100	0.114	0.122
E1	4.700	5.100	0.185	0.201
L1	0.410	0.650	0.016	0.026
θ	0°	6°	0°	6°

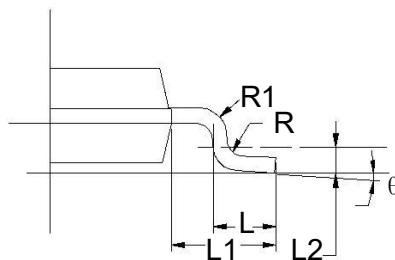


TSSOP-14

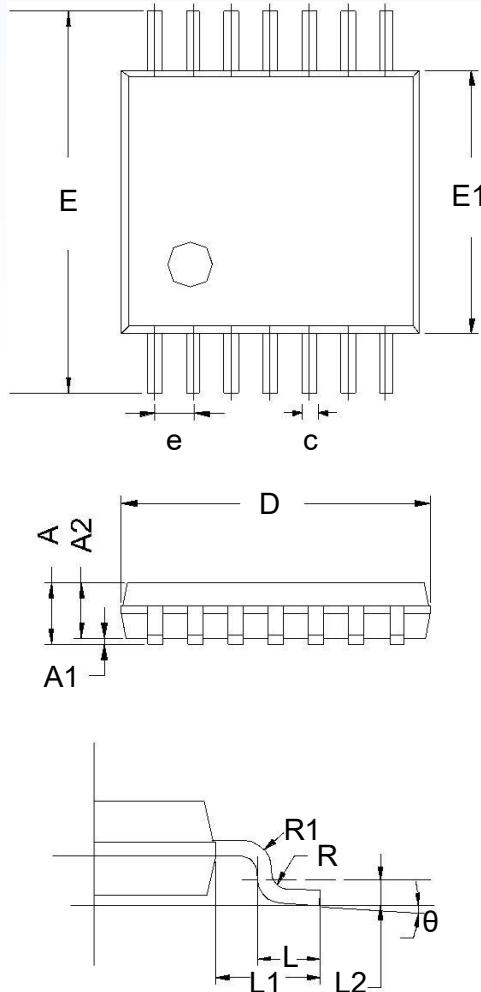

Symbol	Dimensions In Millimeters		
	MIN	TYP	MAX
A	-	-	1.20
A1	0.05	-	0.15
A2	0.90	1.00	1.05
b	0.20	-	0.28
c	0.10	-	0.19
D	4.86	4.96	5.06
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65 BSC		
L	0.45	0.60	0.75
L1	1.00 REF		
L2	0.25 BSC		
R	0.09	-	-
θ	0°	-	8°

SOP-14

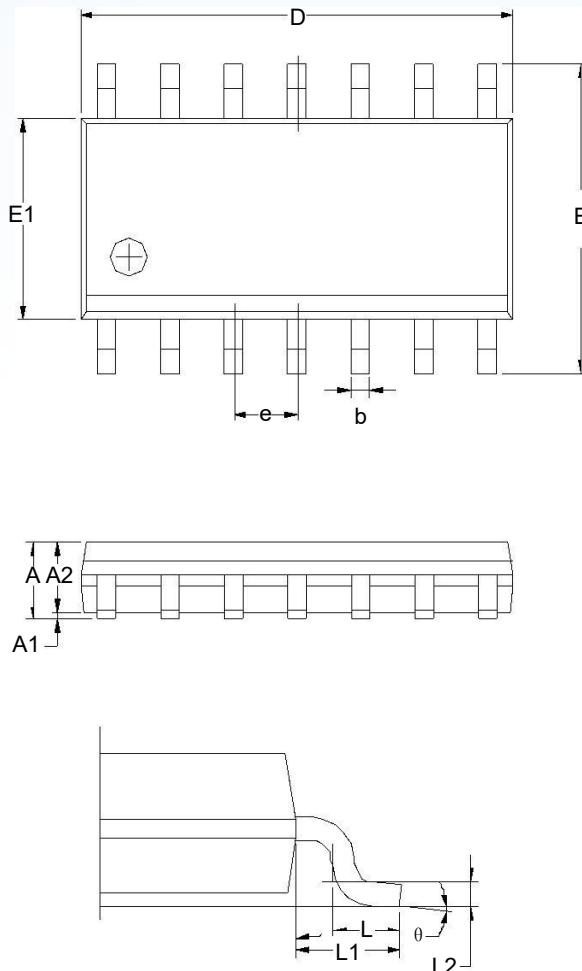

Symbol	Dimensions		
	In Millimeters		
	MIN	TYP	MAX
A	1.35	1.60	1.75
A1	0.10	0.15	0.25
A2	1.25	1.45	1.65
b	0.36		0.49
D	8.53	8.63	8.73
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.45	0.60	0.80
L1	1.04 REF		
L2	0.25 BSC		
θ	0°		8°

Order Code	Package	Baseqty	Deliverymode
LMV321IDCKR	SC70-5	3000	Tape and reel
LMV321IDBVR	SOT23-5	3000	Tape and reel
LMV358IDR	SOP-8	2500	Tape and reel
LMV358IPWR	TSSOP-8	2000	Tape and reel
LMV324IDR	SOP-14	2500	Tape and reel
LMV324IPWR	TSSOP-14	2000	Tape and reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.