


MMBZ Series


■ Dual Common Anode Zener TVS

■ Features

- Allows Either Two Separate Unidirectional Configurations or a Single Bidirectional Configurations.
- Low Leakage Current.
- 24-40 Watts Peak Power Protection.
- Excellent Clamping Capability.
- ESD Rating of Class N(exceeding 16KV)per the Human Body Model.
- Transient Voltage Suppressors Encapsulated in a SOT-23 Package.



■ Simplified outline(SOT-23)



■ Mechanical Data

- Case: Molded Epoxy
- Marking: Marking Code
- Maximum Case Temperature for Soldering Purpose: 260 C for 10 sec.
- Weight: 0.008grams(approx.)

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

| Characteristics | Symbol | Value | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------|---------------------------------------------------------|
| Peak Power Dissipation @ 1.0 ms @ $T_L \leq 25^\circ\text{C}$ ⁽¹⁾ MMBZ5V6A thru MMBZ10VA MMBZ12VA thru MMBZ33VA | P_{PK} | 24 40 | W |
| Total Power Dissipation on FR-5 Board ⁽²⁾ @ $T_A = 25^\circ\text{C}$ Derate above 25°C Thermal Resistance Junction-to-Ambient | P_D $R_{\theta JA}$ | 225 1.8 556 | mW mW/ $^\circ\text{C}$ $^\circ\text{C}/\text{W}$ |
| Total Power Dissipation on Alumina Substrate ⁽³⁾ @ $T_A = 25^\circ\text{C}$ Derate above 25°C Thermal Resistance Junction-to-Ambient | P_D $R_{\theta JA}$ | 300 2.4 417 | mW mW/ $^\circ\text{C}$ $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature Range | T_J, T_{STG} | -55 to +150 | $^\circ\text{C}$ |
| Lead Solder Temperature-Maximum(10 Second Duration) | T_L | 260 | $^\circ\text{C}$ |

NOTE: 1. Non-Repetitive Current Pulse, per FIG 5 and Derated above $T_A = 25^\circ\text{C}$ per FIG 6.

2. FR-5=1.0×0.75×0.62 in.

3. Alumina=0.4×0.3×0.024m, 99.5% alumina

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)
UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or Pins 2 and 3)

($V_F = 0.9\text{ V Max @ } I_F = 10\text{ mA}$)

24 WATTS

| Device | Device Marking | V_{RWM} Volts | $I_R @ V_{RWM}$ uA | Breakdown Voltage | | | Max Zener Impedance ⁽⁵⁾ | | | $V_C @ I_{PP}$ ⁽⁶⁾ | | $\theta_{V_{BR}}$ mV/°C | |
|----------|----------------|--------------------|-----------------------|--------------------|-----|------|------------------------------------|------------------------|-------------------|-------------------------------|-------|----------------------------|----------|
| | | | | $V_{BR}^{(4)} (V)$ | | | @ I_T | Z_{ZT} @ I_{ZT} | $Z_{ZK} @ I_{ZK}$ | | V_C | | I_{PP} |
| | | | | Min | Nom | Max | mA | Ω | Ω | mA | V | | A |
| MMBZ5V6A | 5A6 | 3.0 | 5.0 | 5.32 | 5.6 | 5.88 | 20 | 11 | 1600 | 0.25 | 8.0 | 3.0 | 1.26 |
| MMBZ6V2A | 6A2 | 3.0 | 0.5 | 5.89 | 6.2 | 6.51 | 1.0 | - | - | - | 8.7 | 2.76 | 2.80 |
| MMBZ6V8A | 6A8 | 4.5 | 0.5 | 6.46 | 6.8 | 7.14 | 1.0 | - | - | - | 9.6 | 2.5 | 3.4 |
| MMBZ9V1A | 9A1 | 6.0 | 0.3 | 8.65 | 9.1 | 9.56 | 1.0 | - | - | - | 14 | 1.7 | 7.5 |
| MMBZ10VA | 10A | 6.5 | 0.3 | 9.50 | 10 | 10.5 | 1.0 | - | - | - | 14.2 | 1.7 | 7.5 |

($V_F = 0.9\text{ V Max @ } I_F = 10\text{ mA}$)

40 WATTS

| Device | Device Marking | V_{RWM} Volts | $I_R @ V_{RWM}$ nA | Breakdown Voltage | | | $V_C @ I_{PP}^{(6)}$ | | $\theta_{V_{BR}}$ mV/°C | |
|----------|----------------|--------------------|-----------------------|--------------------|-----|-------|----------------------|-------|----------------------------|----------|
| | | | | $V_{BR}^{(4)} (V)$ | | | @ I_T | V_C | | I_{PP} |
| | | | | Min | Nom | Max | mA | V | | A |
| MMBZ12VA | 12A | 8.5 | 200 | 11.40 | 12 | 12.60 | 1.0 | 17 | 2.35 | 7.5 |
| MMBZ15VA | 15A | 12 | 50 | 14.25 | 15 | 15.75 | 1.0 | 21 | 1.9 | 12.3 |
| MMBZ18VA | 18A | 14.5 | 50 | 17.10 | 18 | 18.90 | 1.0 | 25 | 1.6 | 15.3 |
| MMBZ20VA | 20A | 17 | 50 | 19.00 | 20 | 21.00 | 1.0 | 28 | 1.4 | 17.2 |
| MMBZ27VA | 27A | 22 | 50 | 25.65 | 27 | 28.35 | 1.0 | 40 | 1.0 | 24.3 |
| MMBZ33VA | 33A | 26 | 50 | 31.35 | 33 | 34.65 | 1.0 | 46 | 0.87 | 30.4 |

- V_{BR} measured at pulse test current I_T at an ambient temperature of 25°C .
- Z_{ZT} and Z_{ZK} are measured by dividing the AC voltage drop across the device by the AC current applied. The specified limits are for $I_{Z(AC)} = 0.1 I_{Z(DC)}$, with the AC frequency = 1.0 kHz.
- Surge current waveform per Fig 5 and derate per Fig 6

Electrical Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)

UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or 2 and 3)

| Symbol | Parameter |
|-----------------|---------------------------------------------|
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Maximum Reverse Leakage Current @ V_{RWM} |
| θV_{BR} | Breakdown Voltage @ I_T |
| I_T | Test Current |
| V_{BR} | Maximum Temperature Coefficient of V_{BR} |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |
| Z_{ZT} | Maximum Zener Impedance @ I_{ZT} |
| I_{ZK} | Reverse Current |
| Z_{ZK} | Maximum Zener Impedance @ I_{ZK} |

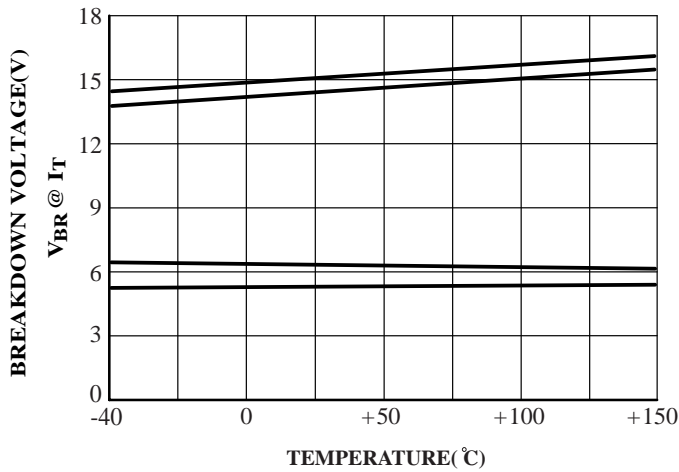
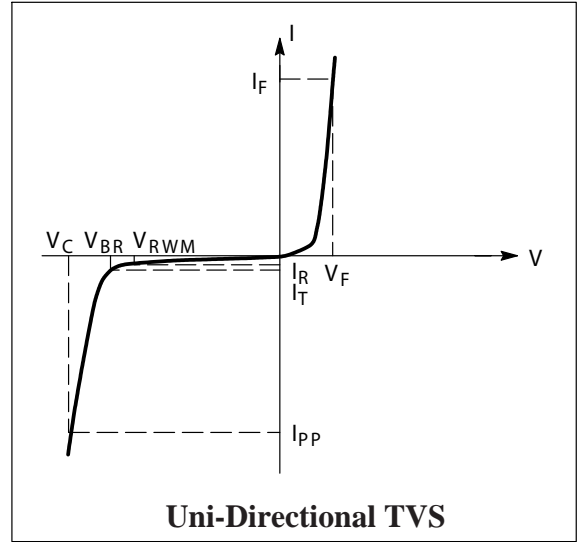


FIG.1 Typical Breakdown Voltage Versus Temperature

(Upper curve for each voltage is bidirectional mode,
lower curve is unidirectional mode)

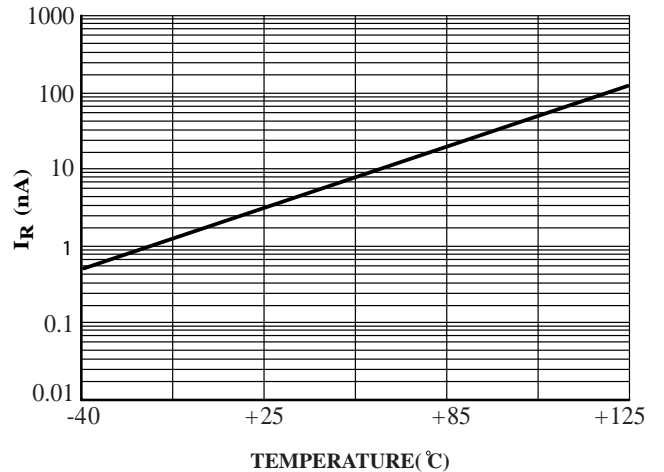


FIG.2 Typical Leakage Current Versus Temperature

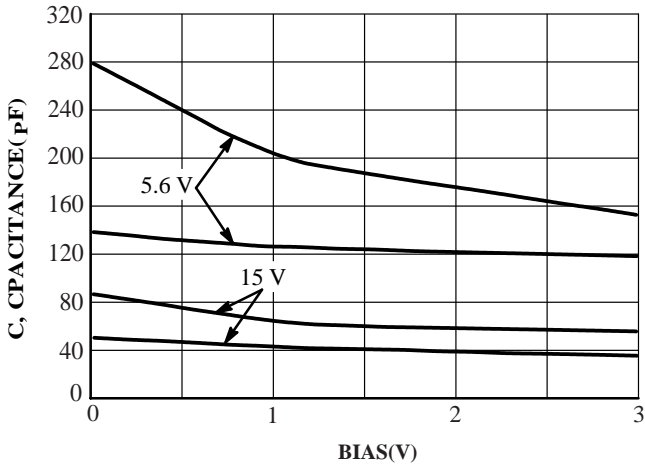


FIG.3 Typical Capacitance Versus Bias Voltage

(Upper curve for each voltage is bidirectional mode,) lower curve is unidirectional mode)

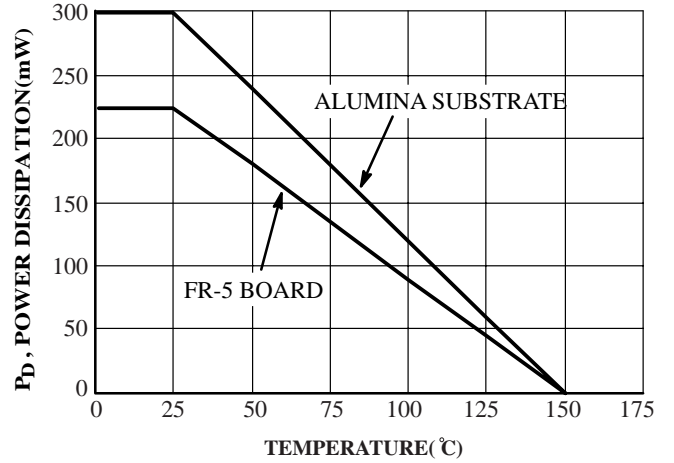


FIG.4 Steady State Power Derating Curve

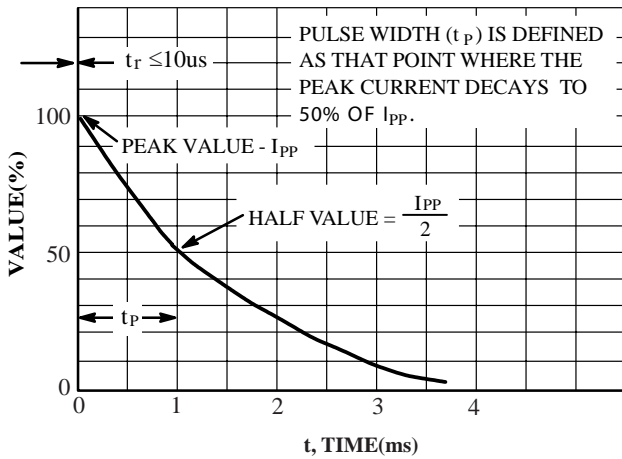


FIG.5 Pulse Waveform

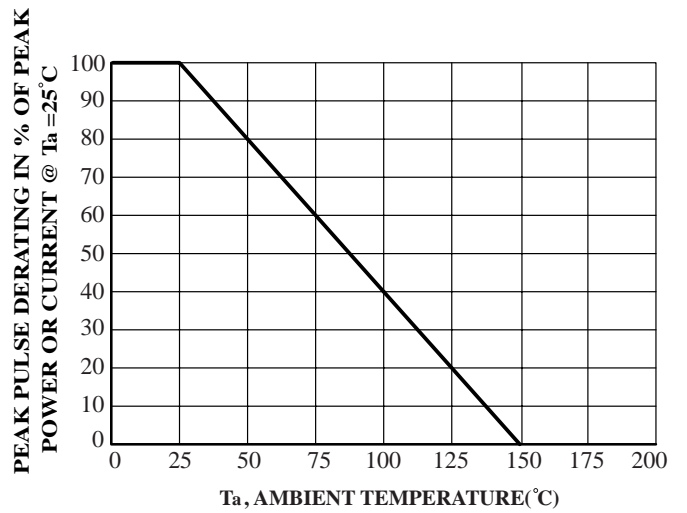


FIG.6 Pulse Derating Curve

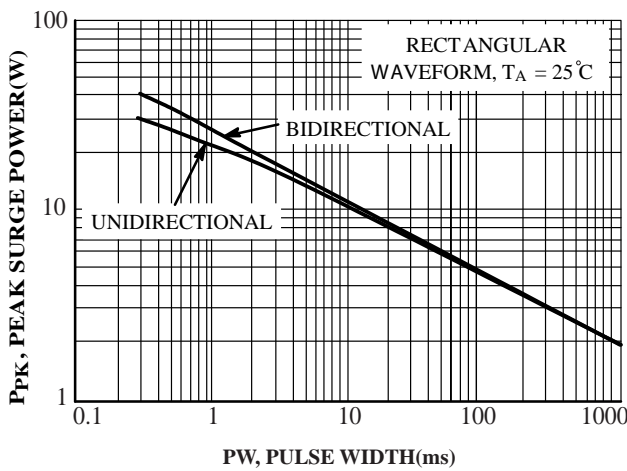


FIG.7 Maximum Non-repetitive Surge Power, P_{PK} Versus PW

Power is defined as $V_{RSM} \times I_Z(pk)$ where V_{RSM} is the clamping voltage at $I_Z(pk)$.


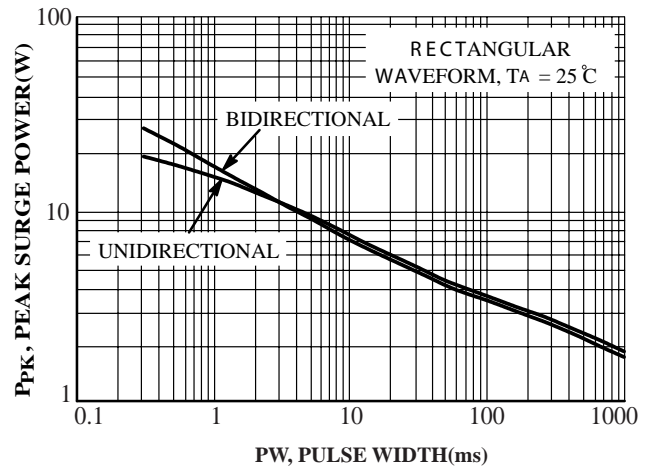


FIG.8 Maximum Non-repetitive Surge Power, $P_{PK}(NOM)$ Versus PW

Power is defined as $V_Z(NOM) \times I_Z(pk)$ where $V_Z(NOM)$ is the nominal Zener voltage measured at the low test current used for voltage classification

■ SOT-23

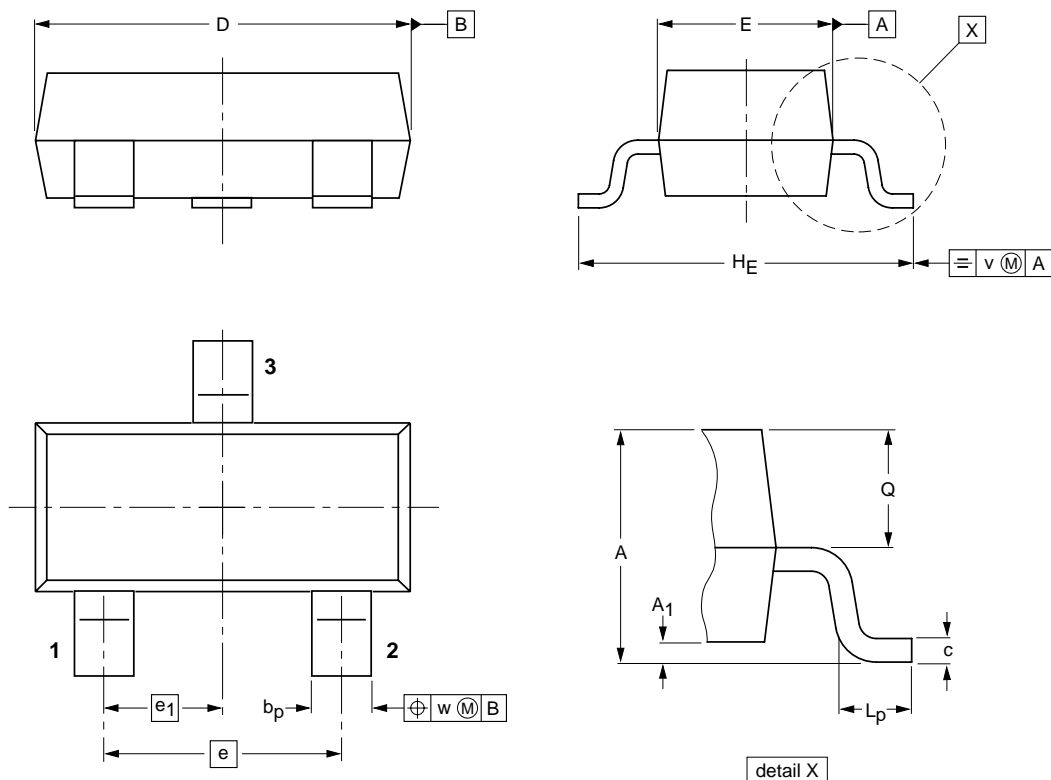

DIMENSIONS (mm are the original dimensions)

| UNIT | A | A ₁ max. | b _p | c | D | E | e | e ₁ | H _E | L _p | Q | v | w |
|------|------------|------------------------|----------------|--------------|------------|------------|-----|----------------|----------------|----------------|--------------|-----|-----|
| mm | 1.1 0.9 | 0.1 | 0.48 0.38 | 0.15 0.09 | 3.0 2.8 | 1.4 1.2 | 1.9 | 0.95 | 2.5 2.1 | 0.45 0.15 | 0.55 0.45 | 0.2 | 0.1 |