


78L06

Three-Terminal Positive Voltage Regulator

Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 6V
- Continuous Total Dissipation P_D : 0.5W ($T_a = 25^{\circ}\text{C}$)

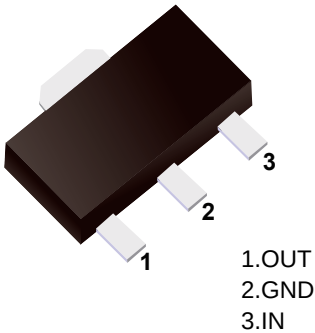

Simplified outline(SOT-89)


Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_i	30	V
Operating Junction Temperature Range	T_{OPR}	$-55 \sim +125$	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^{\circ}\text{C}$

Electrical Characteristics ($V_i=12\text{V}$, $I_o=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^{\circ}\text{C}$	5.75	6.0	6.25	V
		$T_J = 0 \sim 125^{\circ}\text{C}$, $8\text{V} \leq V_i \leq 20\text{V}$, $I_o = 1\text{mA} \sim 40\text{mA}$	5.7	6.0	6.3	V
		$T_J = 0 \sim 125^{\circ}\text{C}$, $I_o = 1\text{mA} \sim 70\text{mA}$	5.7	6.0	6.3	V
Load Regulation	ΔV_o	$T_J = 25^{\circ}\text{C}$, $I_o = 1\text{mA} \sim 100\text{mA}$		16	80	mV
		$T_J = 25^{\circ}\text{C}$, $I_o = 1\text{mA} \sim 40\text{mA}$		9	40	mV
Line Regulation	ΔV_o	$T_J = 25^{\circ}\text{C}$, $8\text{V} \leq V_i \leq 20\text{V}$		35	175	mV
		$T_J = 25^{\circ}\text{C}$, $9\text{V} \leq V_i \leq 20\text{V}$		29	125	mV
Quiescent Current	I_q	$T_J = 25^{\circ}\text{C}$		3.9	6.0	mA
Quiescent current Change	ΔI_q	$T_J = 0 \sim 125^{\circ}\text{C}$, $9\text{V} \leq V_i \leq 20\text{V}$			1.5	mA
		$T_J = 0 \sim 125^{\circ}\text{C}$, $1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output Noise Voltage	V_N	$T_J = 25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{KHz}$		16		μV
Ripple Rejection	RR	$T_J = 0 \sim 125^{\circ}\text{C}$, $9\text{V} \leq V_i \leq 19\text{V}$, $f = 120\text{Hz}$	40	48		dB
Dropout Voltage	V_D	$T_J = 25^{\circ}\text{C}$		1.7		V


Typical Application

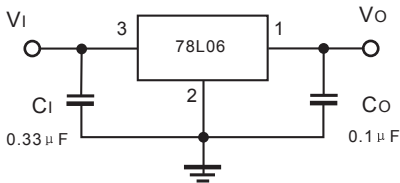


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

78L06


■ Typical Characteristics

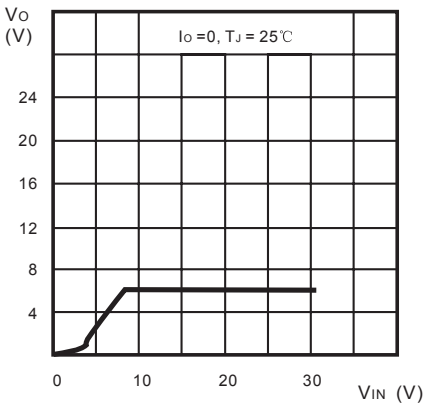


Output Characteristics

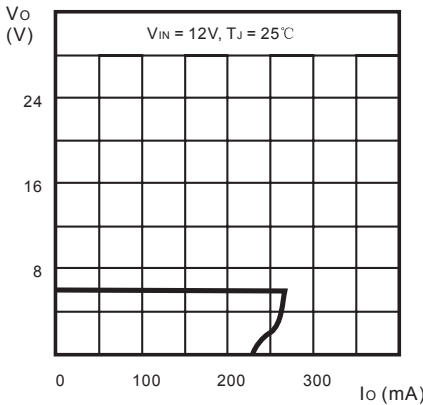


Load Characteristics

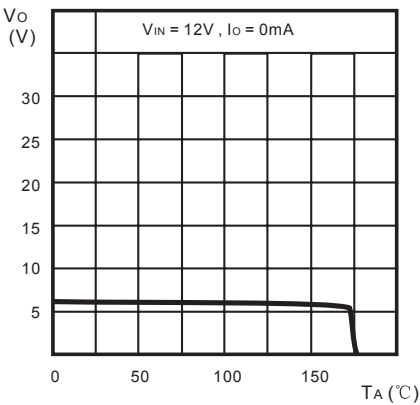

Thermal Shutdown

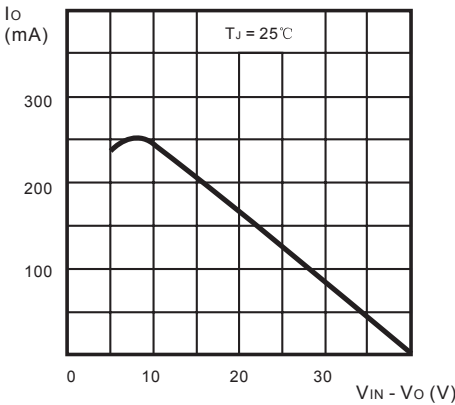


Short Circuit Output Current

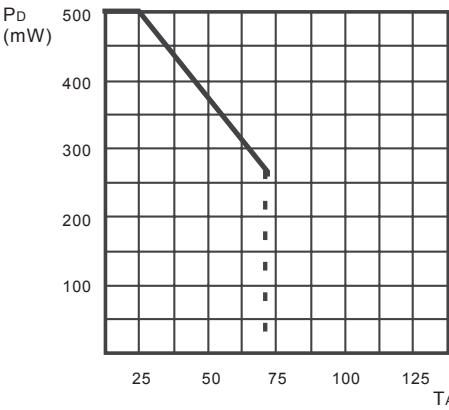

Power Dissipation vs. Ambient Temperature

■ SOT-89

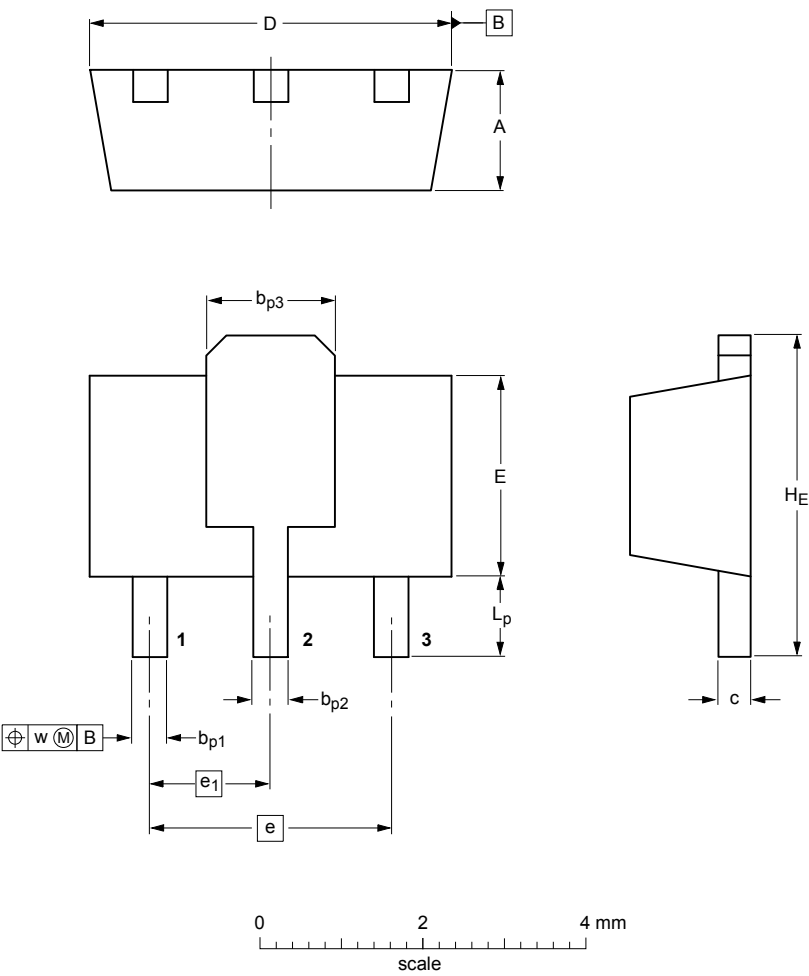

DIMENSIONS (mm are the original dimensions)

UNIT	A	b _{p1}	b _{p2}	b _{p3}	c	D	E	e	e ₁	H _E	L _p	w
mm	1.6 1.4	0.48 0.35	0.53 0.40	1.8 1.4	0.44 0.23	4.6 4.4	2.6 2.4	3.0	1.5	4.25 3.75	1.2 0.8	0.13