

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC


Product Specification

▶ Domestic	Part Number	PESD5V0S1BA/BB/BL
▶ Overseas	Part Number	PESD5V0S1BA/BB/BL
▶ Equivalent	Part Number	PESD5V0S1BA/BB/BL


EV is the abbreviation of name EVVO

Description

Low capacitance ElectroStatic Discharge (ESD) protection diodes in ultra small SMD plastic packages designed to protect one signal line from the damage caused by ESD and other transients.



SOD-882



SOD-323/523

Features

- Bidirectional ESD protection of one line
- Max. peak pulse power: $P_{PP} = 130\text{ W}$
- Low clamping voltage: $V_{(CL)R} = 14\text{ V}$
- Ultra low leakage current: $I_{RM} = 5\text{ nA}$
- ESD protection > 30 kV
- IEC 61000-4-2, level 4 (ESD)
- IEC 61000-4-5 (surge); $I_{PP} = 12\text{ A}$
- Ultra small SMD plastic packages

Applications

- Cellular handsets and accessories
- Portable electronics
- Computers and peripherals
- Communication systems
- Audio and video equipment

Quick reference data

Quick reference data

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{RWM}	reverse stand-off voltage		-	-	5	V
C_d	diode capacitance	$V_R = 0\text{ V};$ $f = 1\text{ MHz}$	-	35	45	pF

Limiting values

Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
P _{PP}	peak pulse power	8/20 μs	[1][2]	-	130	W
I _{PP}	peak pulse current	8/20 μs	[1][2]	-	12	A
T _j	junction temperature			-	150	°C
T _{amb}	ambient temperature			-65	+150	°C
T _{stg}	storage temperature			-65	+150	°C

[1] Non-repetitive current pulse 8/20 μs exponentially decaying waveform according to IEC61000-4-5; see [Figure 1](#).

[2] Measured from pin 1 to pin 2.

ESD maximum ratings

Symbol	Parameter	Conditions		Min	Max	Unit
ESD	electrostatic discharge capability	IEC 61000-4-2 (contact discharge)	[1][2]	-	30	kV
		HBM MIL-Std 883		-	10	kV

[1] Measured from pin 1 to pin 2.

[2] Device stressed with ten non-repetitive ElectroStatic Discharge (ESD) pulses; see [Figure 2](#).

ESD standards compliance

Standard	Conditions
IEC 61000-4-2, level 4 (ESD); Figure 2	> 15 kV (air); > 8 kV (contact)
HBM MIL-STD 883; class 3	> 4 kV

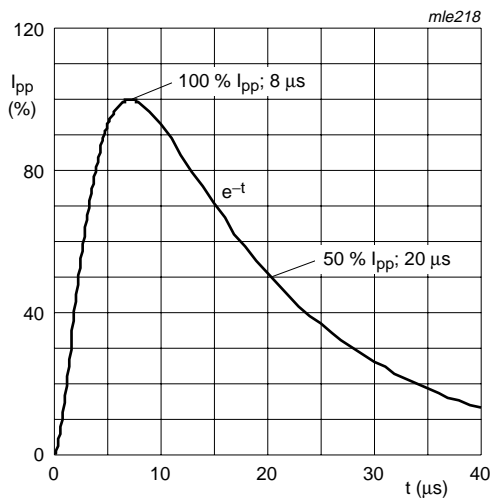


Fig 1. 8/20 μs pulse waveform according to IEC 61000-4-5

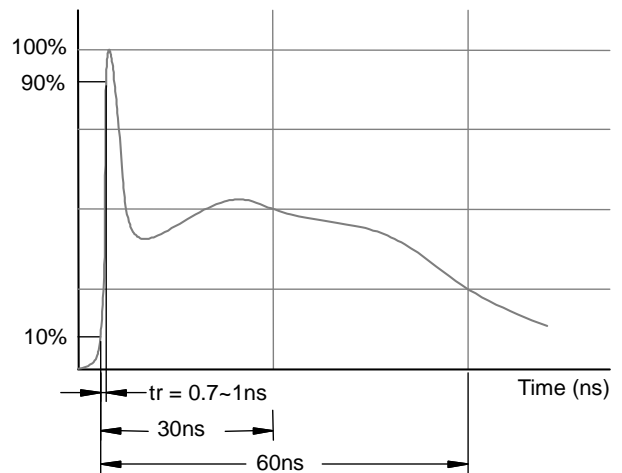


Fig 2. ElectroStatic Discharge (ESD) pulse waveform according to IEC 61000-4-2

Characteristics


Characteristics

T_{amb} = 25°C unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Per diode						
V _{RWM}	reverse stand-off voltage		-	-	5	V
I _{RM}	reverse leakage current	V _{RWM} = 5 V; see Figure 6	-	5	100	nA
V _{(CL)R}	clamping voltage	I _{PP} = 1 A	[1][2]	-	10	V
		I _{PP} = 12 A	[1][2]	-	14	V
V _(BR)	breakdown voltage	I _R = 1 mA	5.5	-	9.5	V
r _{dif}	differential resistance	I _R = 1 mA	-	-	50	Ω
C _d	diode capacitance	V _R = 0 V; f = 1 MHz; see Figure 5	-	35	45	pF

[1] Non-repetitive current pulse 8/20 μs exponentially decaying waveform according to IEC61000-4-5; see [Figure 1](#).

[2] Measures from pin 1 to pin 2.

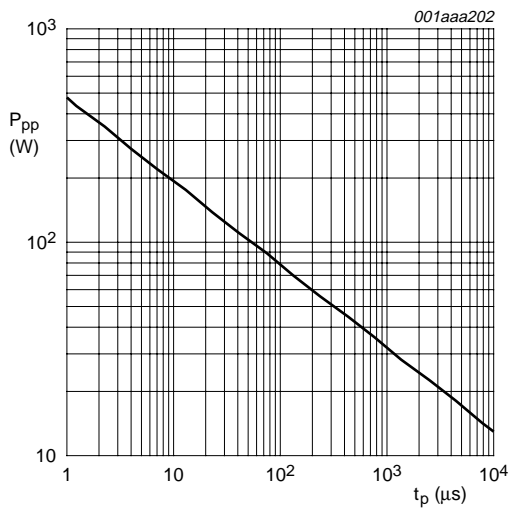

T_{amb} = 25 °C

Fig 3. Peak pulse power dissipation as a function of exponential time duration t_p; typical values


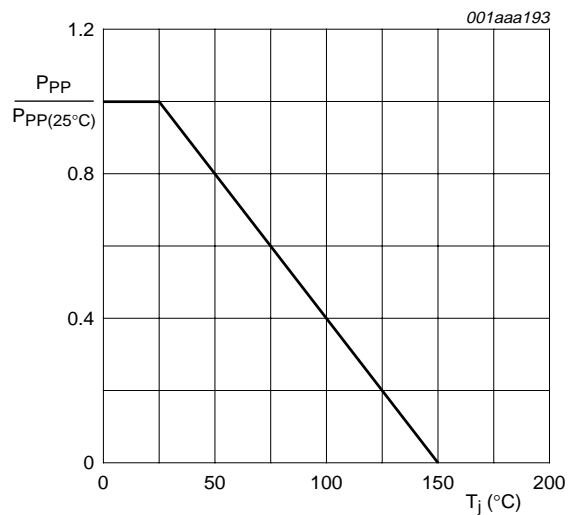


Fig 4. Relative variation of peak pulse power as a function of junction temperature; typical values

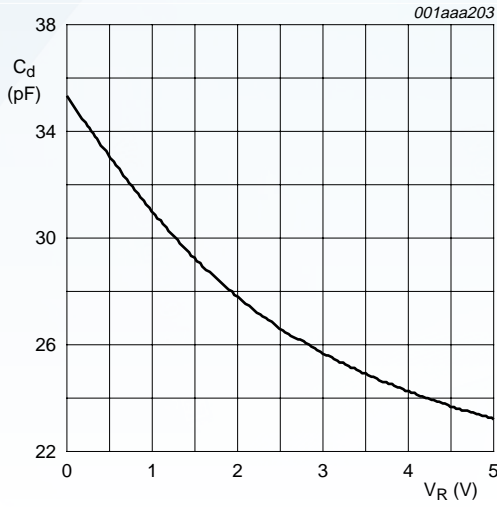

$T_{amb} = 25\text{ }^\circ\text{C}$; $f = 1\text{ MHz}$

Fig 5. Diode capacitance as a function of reverse voltage; typical values



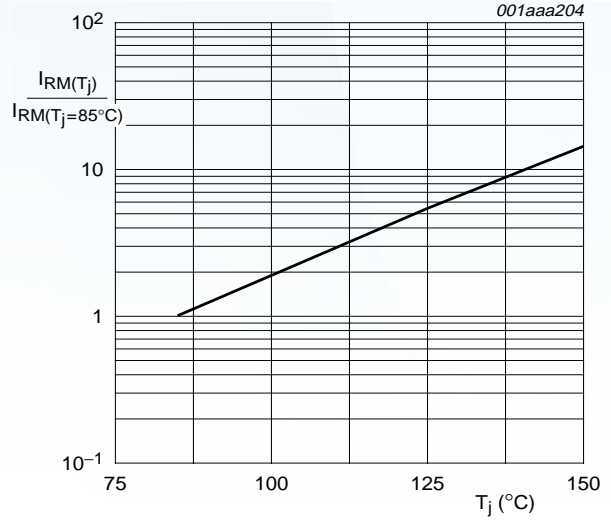



Fig 6. Relative variation of reverse leakage current as a function of junction temperature; typical

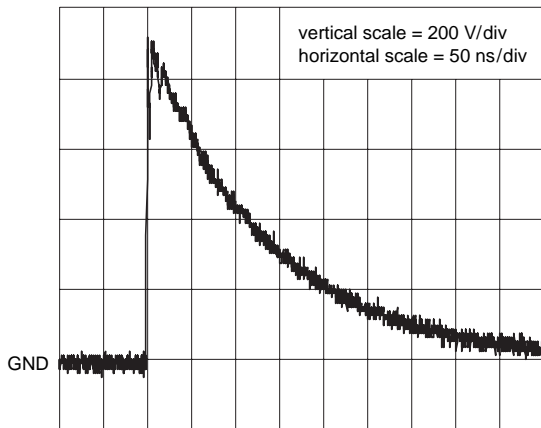


unclamped +1 kV ESD voltage waveform
(IEC61000-4-2 network)

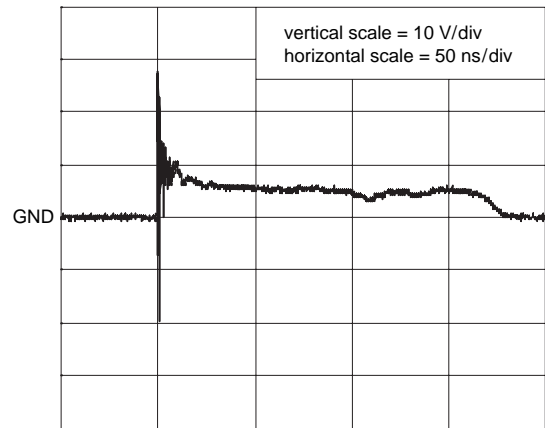

clamped +1 kV ESD voltage waveform
(IEC61000-4-2 network)

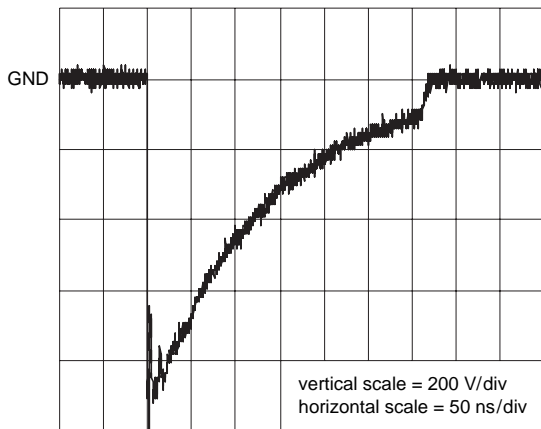

unclamped -1 kV ESD voltage waveform
(IEC61000-4-2 network)

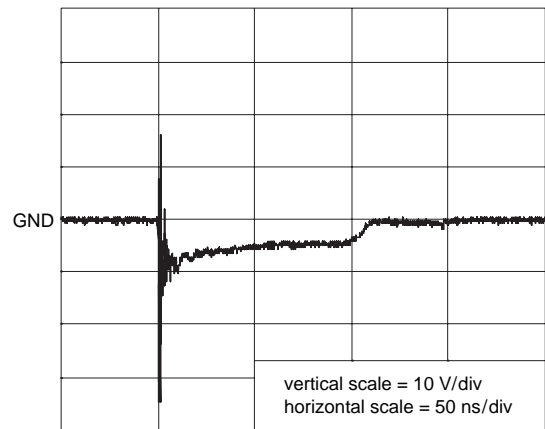


clamped -1 kV ESD voltage waveform
(IEC61000-4-2 network)


006aaa056

Fig 7. ESD clamping test setup and waveforms


SOD-323/SOD-523/SOD-882 PACKAGE OUTLINE DIMENSIONS

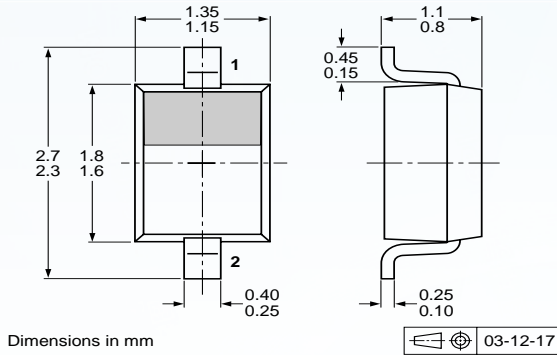

PESD5V0S1BA(SOD-323)

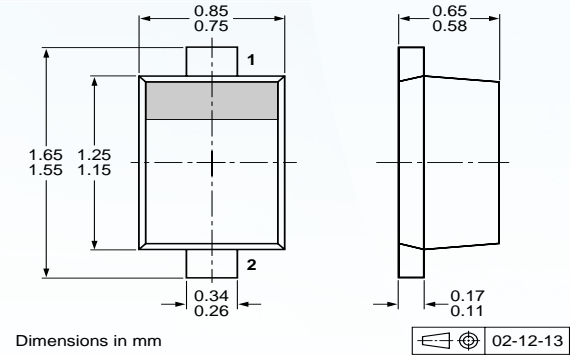


PESD5V0S1BB(SOD-523)

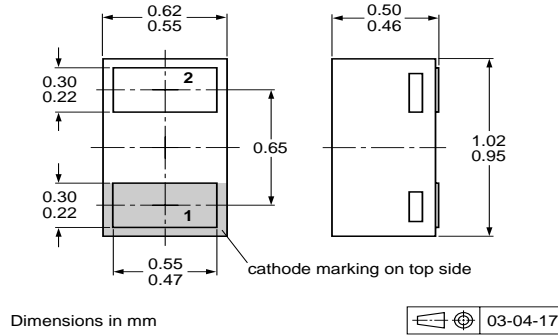

PESD5V0S1BL(SOD-882)

Marking

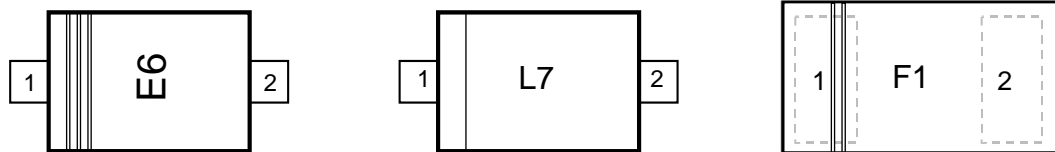

Ordering information

Order code	Marking code	package	Baseqty	Delivermode
PESD5V0S1BA	E6	SOD-323	3000	Tape and reel
PESD5V0S1BB	L7	SOD-523	3000	Tape and reel
PESD5V0S1BL	F1	SOD-882	10000	Tape and reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.