



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

## Product Specification


▶ Domestic Part Number	PESD5V0U1BA/BB/BL
▶ Overseas Part Number	PESD5V0U1BA/BB/BL
▶ Equivalent Part Number	PESD5V0U1BA/BB/BL



EV is the abbreviation of name EVVO

## Description

Ultra low capacitance bidirectional ElectroStatic Discharge (ESD) protection diodes in small Surface-Mounted Device (SMD) plastic packages designed to protect one data line from the damage caused by ESD.

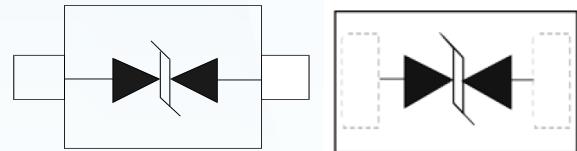

## Features

- Bidirectional ESD protection of one line
- Ultra low diode capacitance:  $C_d = 2.9 \text{ pF}$
- IEC 61000-4-2; level 4 (ESD)
- Ultra low leakage current:  $I_{RM} = 5 \text{ nA}$
- ESD protection of up to 10 kV

## Applications

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories
- 10/100/1000 Ethernet
- Local Area Network (LAN) equipment
- Communication systems
- Portable electronics
- Subscriber Identity Module (SIM) card protection
- FireWire
- High-speed data lines

## Quick reference data

$T_{amb} = 25 \text{ }^{\circ}\text{C}$  unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Per diode</b>						
$V_{RWM}$	reverse standoff voltage		-	-	5	V
$C_d$	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V}$	-	2.9	3.5	pF

## Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
<b>Per device</b>					
T <sub>j</sub>	junction temperature		-	150	°C
T <sub>amb</sub>	ambient temperature		-65	+150	°C
T <sub>stg</sub>	storage temperature		-65	+150	°C

## ESD maximum ratings

Symbol	Parameter	Conditions		Min	Max	Unit
<b>Per diode</b>						
V <sub>ESD</sub>	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	[1][2]	-	10	kV
		MIL-STD-883 (human body model)		-	8	kV

[1] Device stressed with ten non-repetitive ESD pulses.

[2] Measured from pin 1 to pin 2.

## ESD standards compliance

Standard	Conditions
<b>Per diode</b>	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV


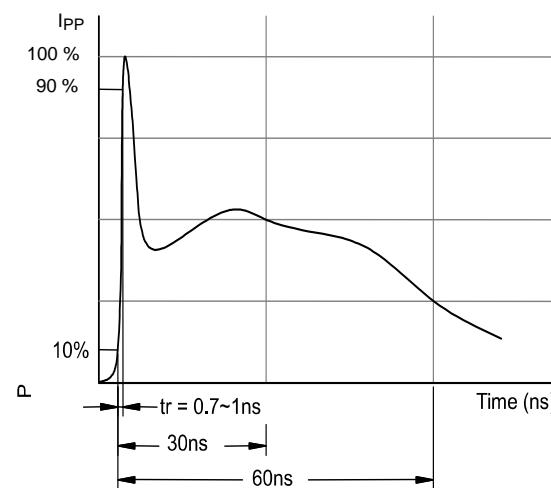


Fig 1. ESD pulse waveform according to IEC 61000-4-2

## Characteristics


$T_{amb} = 25 \text{ }^{\circ}\text{C}$  unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
<b>Per diode</b>						
$V_{RWM}$	reverse standoff voltage		-	-	5	V
$I_{RM}$	reverse leakage current	$V_{RWM} = 5 \text{ V}$	-	5	100	nA
$V_{BR}$	breakdown voltage	$I_R = 5 \text{ mA}$	5.5	7	9.5	V
$C_d$	diode capacitance	$f = 1 \text{ MHz}$				
		$V_R = 0 \text{ V}$	-	2.9	3.5	pF
		$V_R = 5 \text{ V}$	-	1.9	-	pF
$r_{dif}$	differential resistance	$I_R = 1 \text{ mA}$	-	-	100	$\Omega$

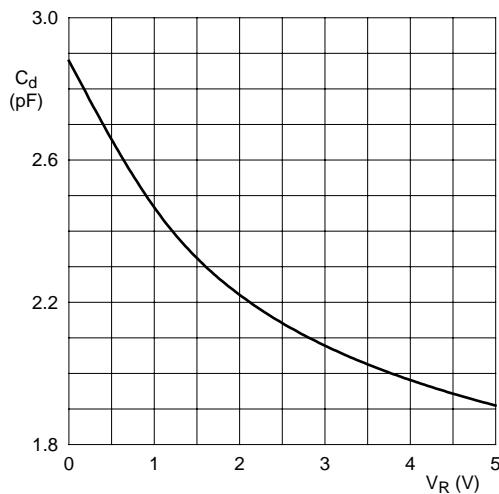


$f = 1 \text{ MHz}; T_{amb} = 25 \text{ }^{\circ}\text{C}$


**Fig 2. Diode capacitance as a function of reverse voltage; typical values**

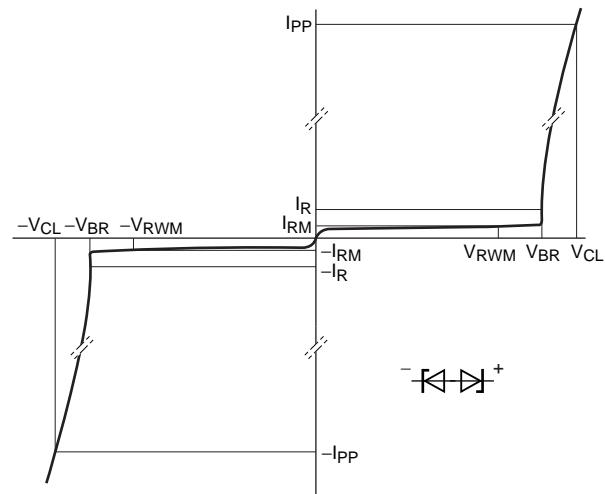


**Fig 3. V-I characteristics for a bidirectional ESD protection diode**

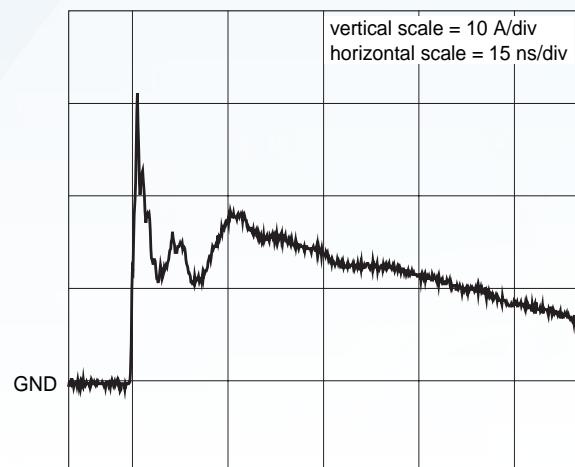


unclamped +8 kV ESD pulse waveform  
(IEC 61000-4-2 network)

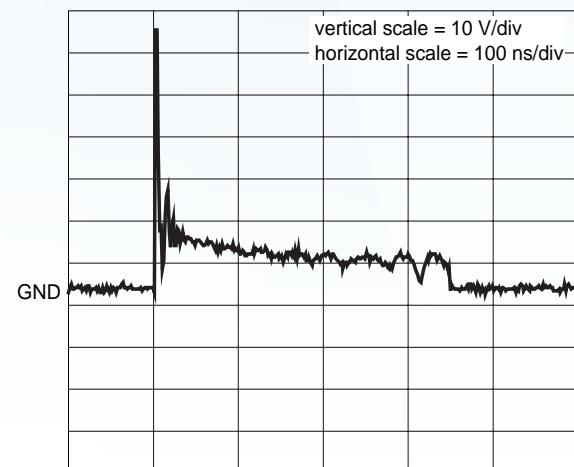

clamped +8 kV ESD pulse waveform  
(IEC 61000-4-2 network) pin 1 to 2

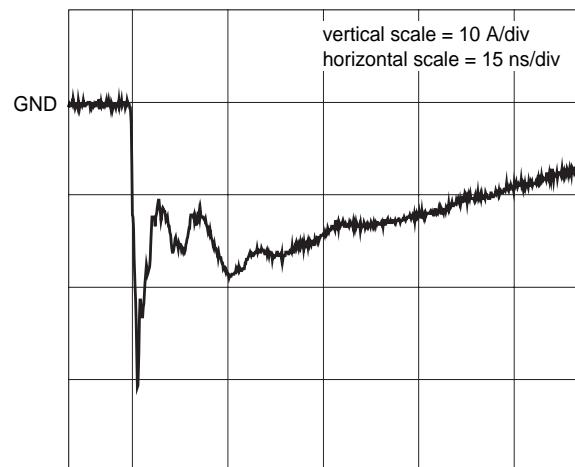




unclamped -8 kV ESD pulse waveform  
(IEC 61000-4-2 network)

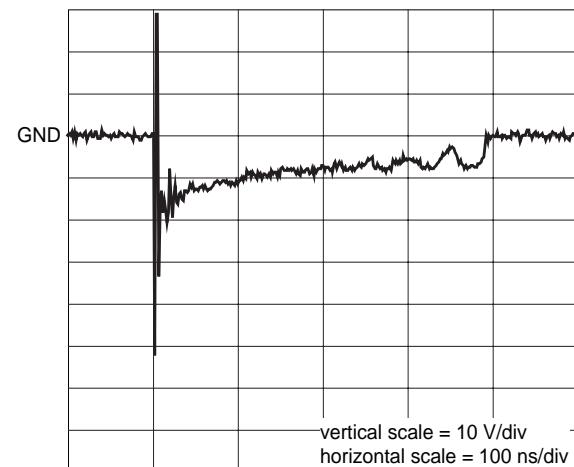

clamped -8 kV ESD pulse waveform  
(IEC 61000-4-2 network) pin 1 to 2

**Fig 4. ESD clamping test setup and waveforms**

## SOD-323/SOD-523/SOD-882 PACKAGE OUTLINE DIMENSIONS

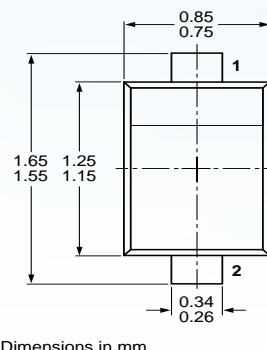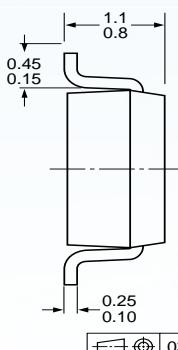
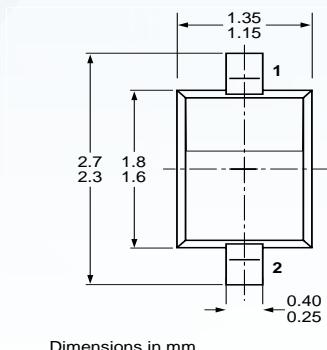


03-12-17

02-12-13

PESD5V0L1UA (SOD323)

PESD5V0L1UB (SOD523)

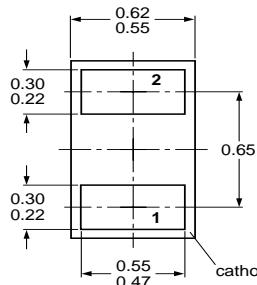

03-04-17

03-04-17

PESD5V0L1UL (SOD882)

## Marking



## Ordering information

Order Code	Marking code	Package	Baseqty	Delivery mode
PESD5V0U1BA	AA	SOD-323	3000	Tape and reel
PESD5V0U1BB	B3	SOD-523	3000	Tape and reel
PESD5V0U1BL	VB	SOD-882	10000	Tape and reel

## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.