



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC



Product Specification

▶ Domestic Part Number	PESD5V0V1BA/BB/BL
▶ Overseas Part Number	PESD5V0V1BA/BB/BL
▶ Equivalent Part Number	PESD5V0V1BA/BB/BL



Features

- Bidirectional ESD protection of one line
- Very low diode capacitance: $C_d = 11 \text{ pF}$
- Max. peak pulse power: $P_{PP} = 45 \text{ W}$
- Low clamping voltage: $V_{CL} = 12.5 \text{ V}$
- Ultra low leakage current: $I_{RM} < 1 \text{ nA}$
- ESD protection up to 30 kV
- IEC 61000-4-2; level 4 (ESD)
- IEC 61000-4-5 (surge); $I_{PP} = 4.8 \text{ A}$
- AEC-Q101 qualified

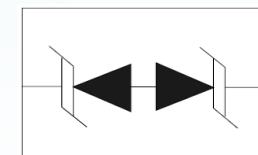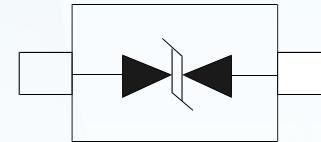

Transparent
top view

Applications

- Computers and peripherals
- Audio and video equipment
- Cellular handsets and accessories
- Subscriber Identity Module (SIM) card protection
- Communication systems
- Portable electronics
- 10/100 Mbit/s Ethernet
- FireWire

Mechanical Data

- SOD-882 package
- Molding compound flammability rating: UL 94V-0
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

Quick reference data

Quick reference data

$T_{amb} = 25 \text{ }^{\circ}\text{C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{RWM}	reverse standoff voltage		-	-	5	V
C_d	diode capacitance	$f = 1 \text{ MHz}; V_R = 0 \text{ V}$	-	11	13	pF

Ordering information

Ordering information

Type number	Package			Version
	Name	Description		
PESD5V0V1BA	SC-76	plastic surface-mounted package; 2 leads		SOD323
PESD5V0V1BB	SC-79	plastic surface-mounted package; 2 leads		SOD523
PESD5V0V1BL	-	leadless ultra small plastic package; 2 terminals; body 1.0 ? 0.6 ? 0.5 mm		SOD882

Limiting values

Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
Per diode						
P _{PP}	peak pulse power	t _p = 8/20 ?s	[1]	-	45	W
I _{PP}	peak pulse current	t _p = 8/20 ?s	[1]	-	4.8	A

Limiting values ...continued

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
Per device					
T _j	junction temperature		-	150	°C
T _{amb}	ambient temperature		-55	+150	°C
T _{stg}	storage temperature		-65	+150	°C

[1] Non-repetitive current pulse 8/20 ?s exponential decay waveform according to IEC 61000-4-5.

ESD maximum ratings

T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Max	Unit	
V _{ESD}	electrostatic discharge voltage	IEC 61000-4-2 (contact discharge)	[1]	-	30	kV
		machine model	-	2	kV	
		MIL-STD-883 (human body model)	-	16	kV	

[1] Device stressed with ten non-repetitive ESD pulses.

ESD standards compliance

Standard	Conditions
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3B (human body model)	> 8 kV

Characteristics

Characteristics

T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V _{RWM}	reverse standoff voltage			-	-	5	V
I _{RM}	reverse leakage current	V _{RWM} = 5 V		-	< 1	10	nA
V _{BR}	breakdown voltage	I _R = 5 mA		5.8	6.8	7.8	V
C _d	diode capacitance	f = 1 MHz; V _R = 0 V		-	11	13	pF
V _{CL}	clamping voltage	I _{PP} = 4.8 A	[1]	-	-	12.5	V
r _{dyn}	dynamic resistance	I _R = 10 A	[2]	-	0.2	-	Ω
r _{dif}	differential resistance	I _R = 5 mA		-	-	35	Ω

[1] Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC 61000-4-5.

[2] Non-repetitive current pulse, Transmission Line Pulse (TLP) t_p = 100 ns; square pulse;
ANS/IESD STM5.1-2008.

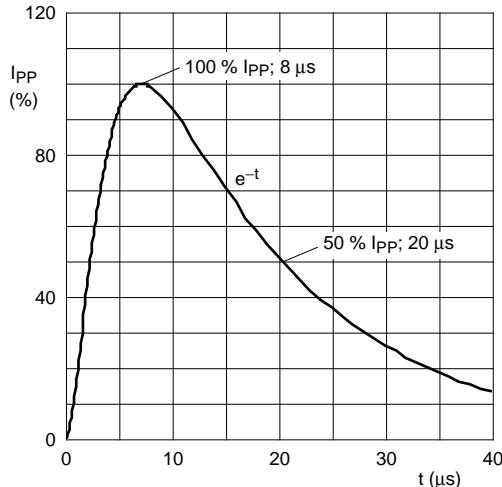


Fig 1. 8/20 ?s pulse waveform according to IEC 61000-4-5

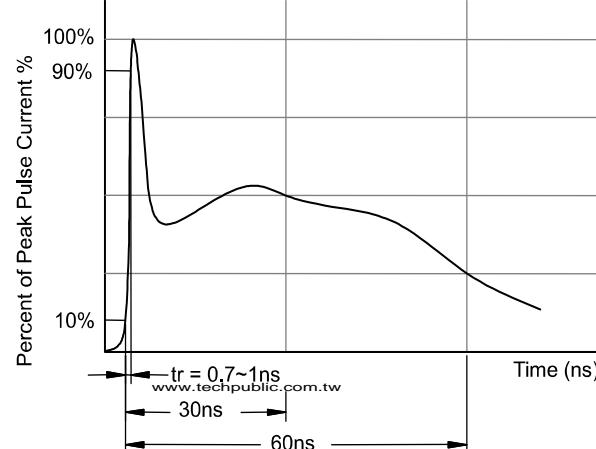


Fig 2. ESD pulse waveform according to IEC 61000-4-2

PESD5V0V1BA/BB/BL

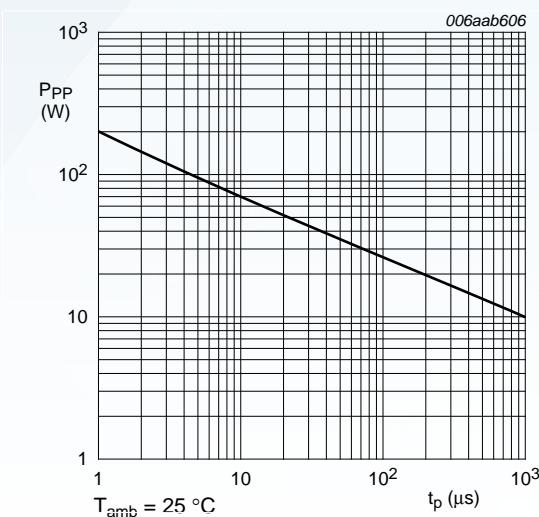


Fig 3. Peak pulse power as a function of exponential pulse duration; typical values

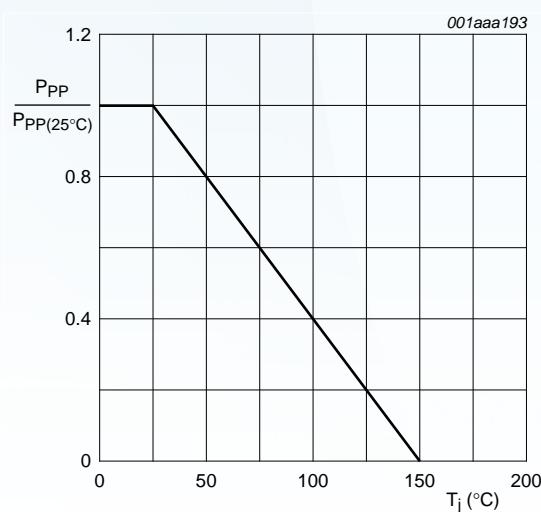


Fig 4. Relative variation of peak pulse power as a function of junction temperature; typical values

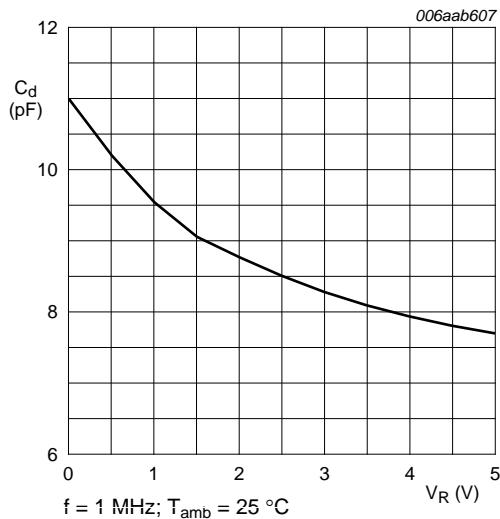


Fig 5. Diode capacitance as a function of reverse voltage; typical values




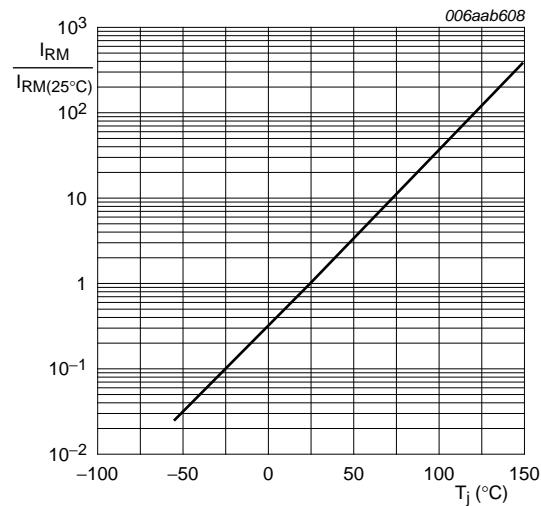


Fig 6. Relative variation of reverse leakage current as a function of junction temperature; typical values

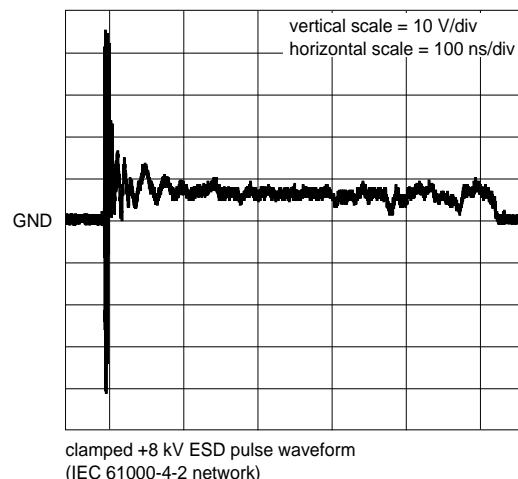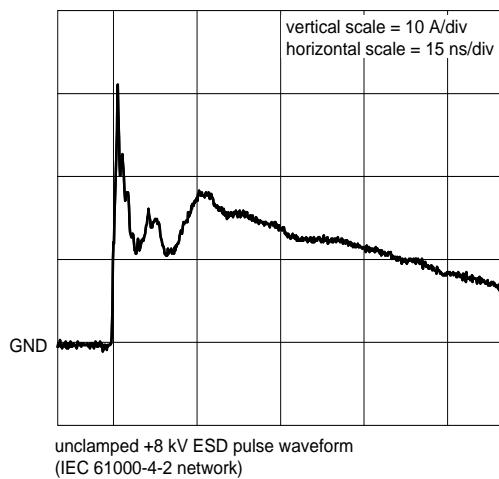


Outline Drawing – SOD-323/SOD-523/SOD-882

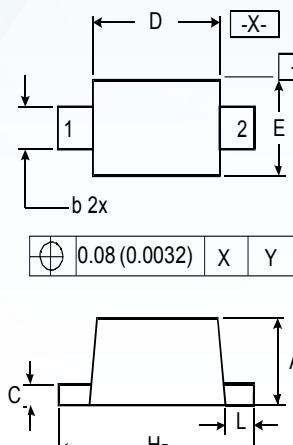


DIMENSIONS					
SYMBOL	MILLIMETER		INCHES		
	MIN	MAX	MIN	MAX	
A	0.50	0.70	0.020	0.028	
b	0.25	0.35	0.010	0.014	
C	0.07	0.20	0.0028	0.0079	
D	1.10	1.30	0.043	0.051	
E	0.70	0.90	0.028	0.035	
H _E	1.50	1.70	0.059	0.067	
L	0.15	0.25	0.006	0.010	

SOD-523

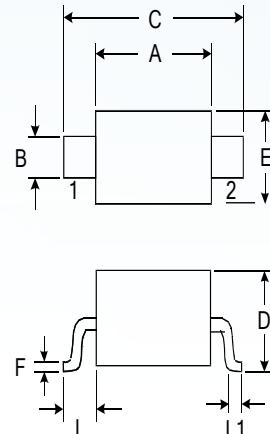

DIMENSIONS					
SYMBOL	MILLIMETER		INCHES		
	MIN	MAX	MIN	MAX	
A	1.600	1.800	0.063	0.071	
B	0.250	0.350	0.010	0.014	
C	2.500	2.700	0.098	0.106	
D			1.000		0.039
E	1.200	1.400	0.047	0.055	
F	0.080	0.150	0.003	0.006	
L	0.475 REF		0.019REF		
L1	0.250	0.400	0.010	0.016	
H	0.000	0.100	0.000	0.004	


SOD-323

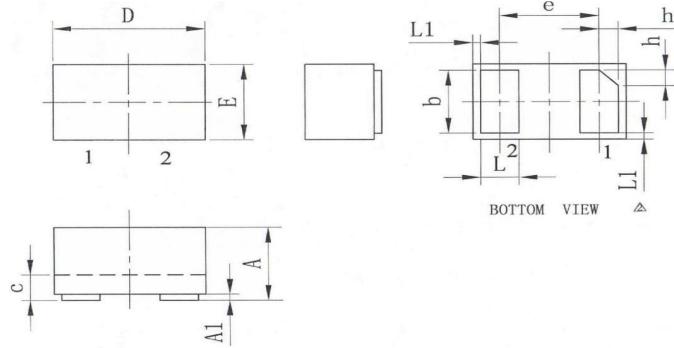

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
c	0.12	0.15	0.18
D	0.95	1.00	1.05
e		0.65BSC	
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1		0.05REF	
h	0.07	0.12	0.17
载体尺寸 (MM)			20*20

SOD-882

Marking

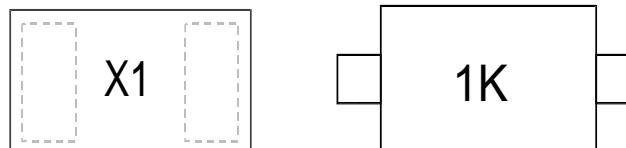

Ordering information

Order code	Marking codes	Package	Baseqty	Delivery mode
PESD5V0V1BA	1K	SOD-323	10000	Tape and reel
PESD5V0V1BB	Z9	SOD-523	10000	Tape and reel
PESD5V0V1BL	X1	SOD-882	10000	Tape and reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.