

# EVVOSEMI<sup>®</sup>

THINK CHANGE DO




ESD




TVS




MOS



LDO



Diode



Sensor



DC-DC

## Product Specification

▶ Domestic	Part Number	SPD9105W
▶ Overseas	Part Number	SPD9105W
▶ Equivalent	Part Number	SPD9105W

EV is the abbreviation of name EVVO

## 1 Lines, Bi-directional, low Capacitance Transient Voltage Suppressors


### Descriptions

The SPD9105W is a low capacitance TVS (Transient Voltage Suppressor) array designed to protect high speed data interfaces. It has been specifically designed to protect sensitive electronic components which are connected to data and transmission lines from over-stress caused by Electrostatic Discharge (ESD), cable discharge events (CDE), lightning and other induced voltage surges.

The SPD9105W incorporates low capacitance steering diodes that reduce the typical capacitance to 1pF per line.

The SPD9105W may be used to provide ESD protection up to  $\pm 30\text{kV}$  (contact discharge) according to IEC61000-4-2, and withstand peak pulse current up to 20A (8/20 $\mu\text{s}$ ) according to IEC61000-4-5.

The SPD9105W is available in SOD-323 package. Standard products are Pb-free and Halogen-free.

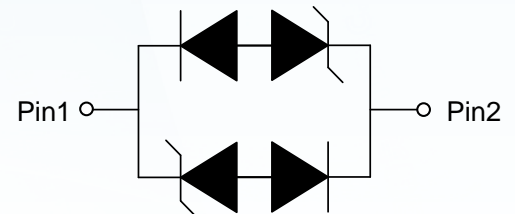

Circuit diagram

### Features

- Stand-off voltage: 5V Max.
- Transient protection for each line according to IEC61000-4-2 (ESD):  $\pm 30\text{kV}$  (contact discharge)  
IEC61000-4-4 (EFT): 40A - 5/50ns  
IEC61000-4-5 (surge): 20A (8/20 $\mu\text{s}$ ).
- Low capacitance:  $C_J = 1\text{pF}$  typ.
- Ultra-low leakage current:  $I_R = 0.1\text{nA}$  typ.
- Low clamping voltage.
- Solid-state silicon technology

### Applications

- 10/100 Ethernet
- STB
- Router
- Networking
- Modem

**1 Lines, Bi-directional, low Capacitance  
 Transient Voltage Suppressors**
**Absolute maximum ratings**

Parameter	Symbol	Rating	Unit
Peak pulse power ( $t_p = 8/20\mu\text{s}$ )	$P_{pk}$	360	W
Peak pulse current ( $t_p = 8/20\mu\text{s}$ )	$I_{PP}$	20	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 30$	
Junction temperature	$T_J$	125	$^{\circ}\text{C}$
Operating temperature	$T_{OP}$	-40~85	$^{\circ}\text{C}$
Lead temperature	$T_L$	260	$^{\circ}\text{C}$
Storage temperature	$T_{STG}$	-55~150	$^{\circ}\text{C}$


**Electrical characteristics ( $T_A = 25^{\circ}\text{C}$ , unless otherwise noted)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse maximum working voltage	$V_{RWM}$				5	V
Reverse leakage current	$I_R$	$V_{RWM} = 5\text{V}$		0.1	100	nA
Reverse breakdown voltage	$V_{BR}$	$I_T = 1\text{mA}$	5.6			V
Clamping voltage <sup>1)</sup>	$V_{CL}$	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$			9	V
		$I_{PP} = 5\text{A}, t_p = 8/20\mu\text{s}$			11	V
		$I_{PP} = 20\text{A}, t_p = 8/20\mu\text{s}$			18	V
Junction capacitance	$C_J$	$V_R = 0\text{V}, f = 1\text{MHz}$ I/O to I/O		1.0	1.5	pF


1) According to IEC61000-4-5.

1 Lines, Bi-directional, low Capacitance  
Transient Voltage Suppressors


Typical characteristics ( $T_A = 25^\circ\text{C}$ , unless otherwise noted)

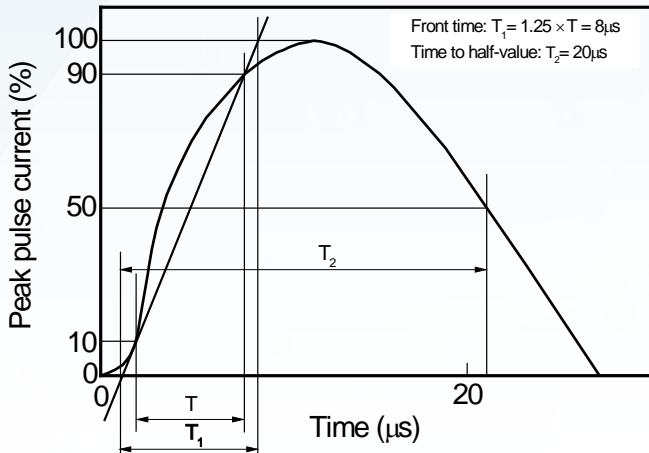


8/20μs waveform per IEC61000-4-5

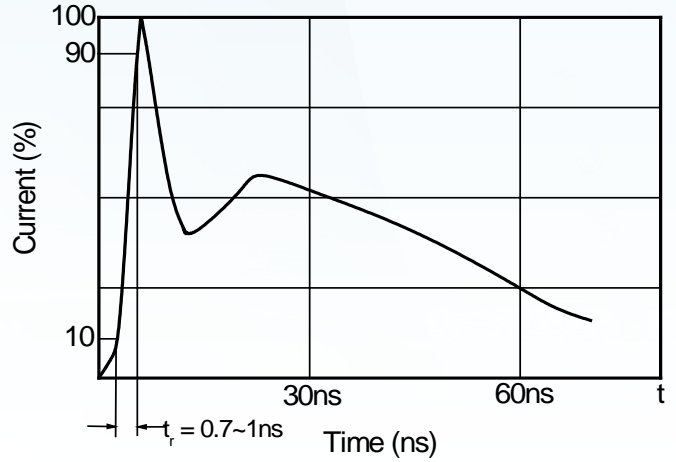


Contact discharge current waveform per IEC61000-4-2

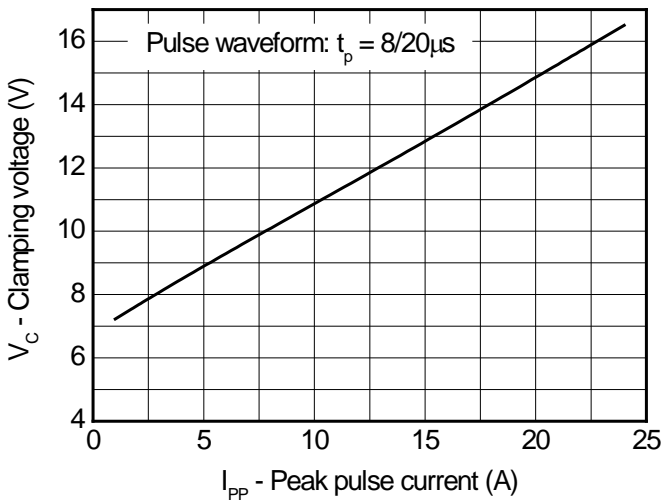


Clamping voltage vs. Peak pulse current

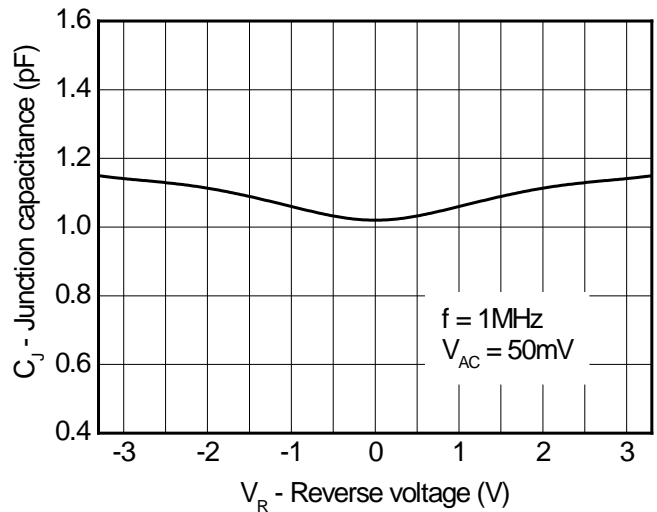

Capacitance vs. Reverse voltage

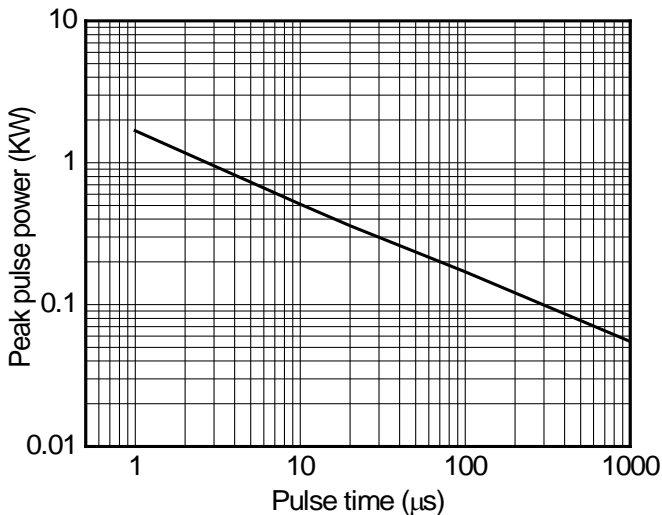


Non-repetitive peak pulse power vs. Pulse time

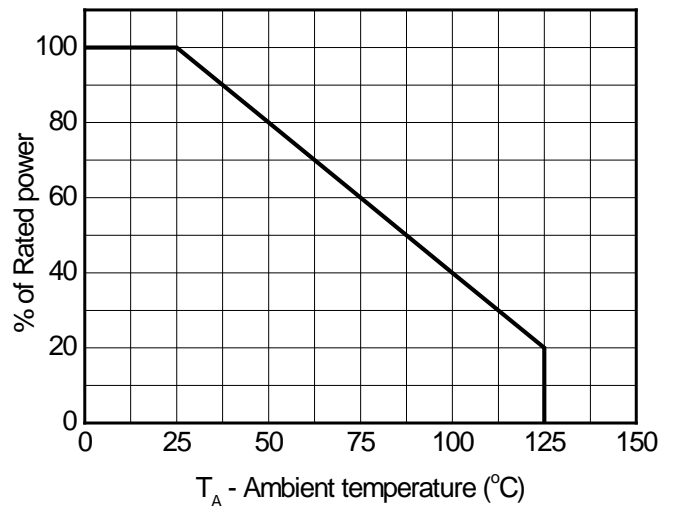


Power derating vs. Ambient temperature

**1 Lines, Bi-directional, low Capacitance  
Transient Voltage Suppressors**


**Typical characteristics (T<sub>A</sub>=25°C, unless otherwise noted)**

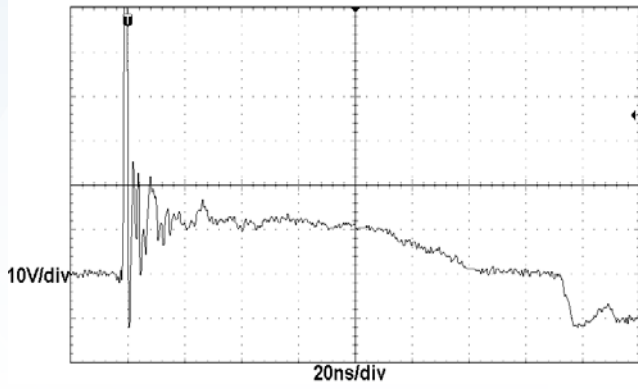

**ESD clamping  
(+8kV contact discharge per IEC61000-4-2)**

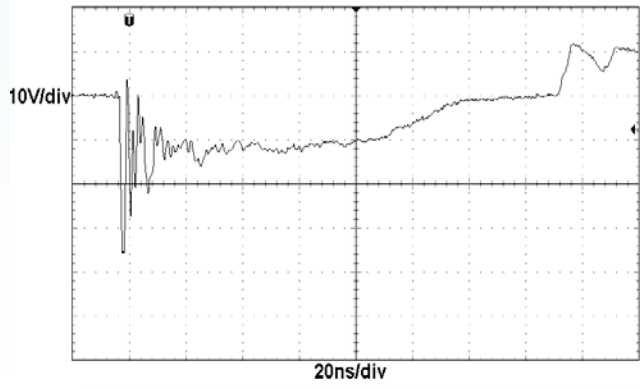


**ESD clamping  
(-8kV contact discharge per IEC61000-4-2)**

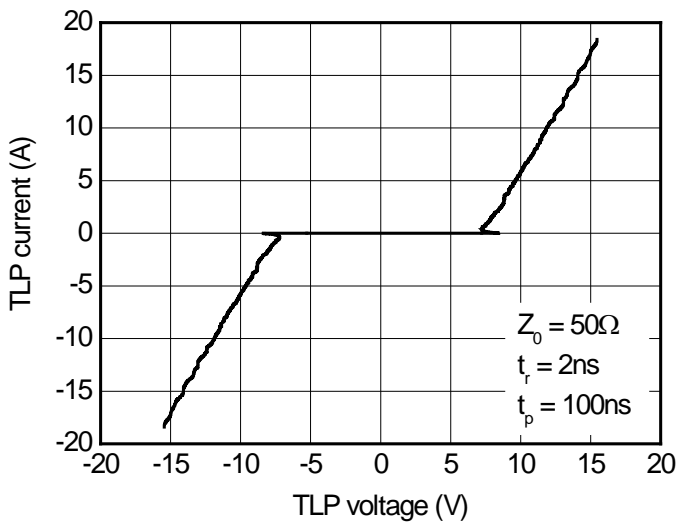

**TLP Measurement**

1 Lines, Bi-directional, low Capacitance  
 Transient Voltage Suppressors

## Outline Drawing - SOD-323

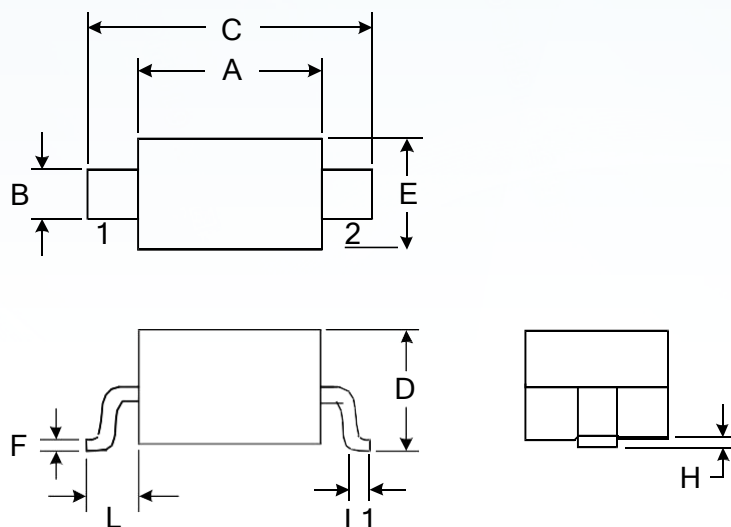

DIMENSIONS				
SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	1.600	1.800	0.063	0.071
B	0.250	0.350	0.010	0.014
C	2.500	2.700	0.098	0.106
D		1.000		0.039
E	1.200	1.400	0.047	0.055
F	0.080	0.150	0.003	0.006
L	0.475 REF		0.019REF	
L1	0.250	0.400	0.010	0.016
H	0.000	0.100	0.000	0.004

## Marking



## Ordering information

Order code	Package	Baseqty	Delivery mode
SPD9105W	SOD-323	3000	Tape and reel

## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.