



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic Part Number	IRF9328
▶ Overseas Part Number	IRF9328
▶ Equivalent Part Number	IRF9328




IRF9328

V_{DSS} (V)	$R_{DS(on)}$	$I_D(A)$
-30	9.5mΩ(Typ)@ $V_{GS}=-10V$	-12
	17mΩ(Typ)@ $V_{GS}=-4.5V$	

FEATURE:

- The IRF9328 is the high cell density trenched P-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications.


Pin Description

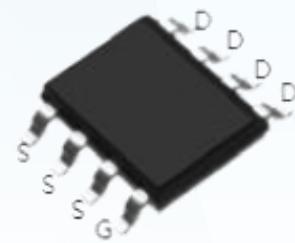

SOP-8

APPLICATIONS:

- Load Switch



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DSS}	Drain-Source Voltage	-30	V
V_{GSS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current($V_{GS} = -4.5V$)	$T_A=25^\circ C$	-12
		$T_A=70^\circ C$	-9
T_J	Maximum Junction Temperature	150	$^\circ C$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
I_{DM}	Pulsed Drain Current	-46	A
P_D	Maximum Power Dissipation	$T_A=25^\circ C$	4.5
		$T_A=70^\circ C$	---
E_{AS}	Avalanche Energy, Single Pulsed	55	mJ
$R_{\theta JC}$	Thermal Resistance-Junction to Case	24	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	75	$^\circ C/W$

Electrical Characteristics ($T_A=25^\circ\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BVDSS	Drain-Source Breakdown Voltage	VGS=0V, ID=250uA	-30	---	---	V
VGS(th)	Gate threshold voltage	VDS=VGS, ID=250uA	-1.0	-1.5	-2.5	V
RDS(ON)	Drain-Source On-state Resistance	VGS=-10V , ID=-10A	---	9.5	14	mΩ
		VGS=-4.5V , ID=-5A	---	17	24	mΩ
IGSS	Gate-source leakage current	VGS=±20V , VDS=0V	---	---	±100	μA
IDSS	Zero gate voltage drain current	VDS=-30V, VGS=0V, TJ=25°C	---	---	-1	μA
		TJ=55°C	---	---	---	
Dynamic Characteristic						
Ciss	Input Capacitance	VGS=0V, VDS=-15V, Frequency=1.0MHz	---	1770	---	pF
Coss	Output Capacitance		---	233	---	
Crss	Reverse Transfer Capacitance		---	206	---	
QG	Gate Total Charge	VDS=-15V, VGS=-10V, IDS=-5A	---	22	---	nC
Qgs	Gate-Source charge		---	1.0	---	
Qgd	Gate-Drain charge		---	1.8	---	
td(on)	Turn-on delay time	VDD=-15V , VGS=-10V , RG=3Ω, ID=-10A	---	9	---	ns
tr	Turn-on Rise Time		---	13	---	
td(off)	Turn-off Delay Time		---	48	---	
tf	Turn-off Fall Time		---	20	---	
RG	Gate Resistance	VGS=0V, VDS=0V, F=1MHz	---	---	---	Ω
Diode Characteristics						
VSD	Diode Forward Voltage	VGS=0V , IS=1A , TJ=25°C	---	---	1.2	V
trr	Reverse Recovery Time	ISD=4.1A, dISD/dt=-100A/μs	---	64	---	ns
Qrr	Reverse Recovery Charge		---	25	---	nC

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 1: Output Characteristics

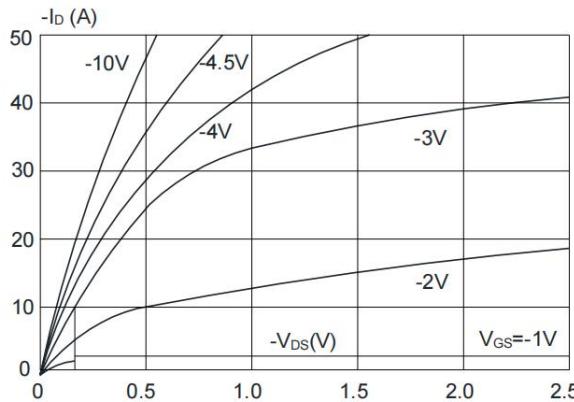


Figure 3: On-resistance vs. Drain Current

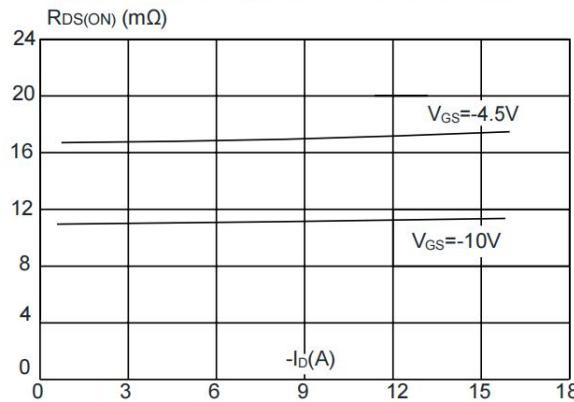


Figure 5: Gate Charge Characteristics

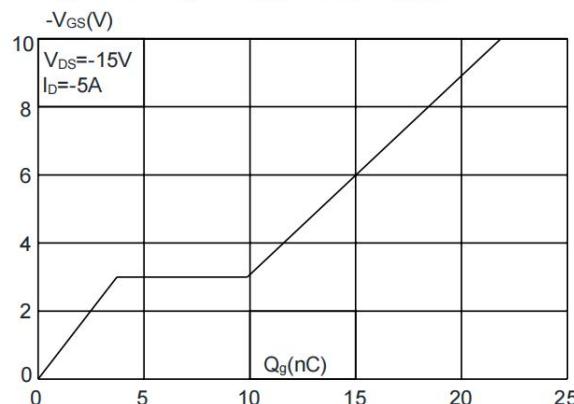


Figure 2: Typical Transfer Characteristics

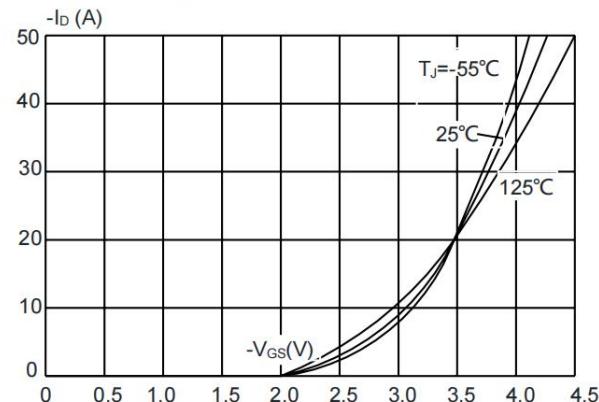


Figure 4: Body Diode Characteristics

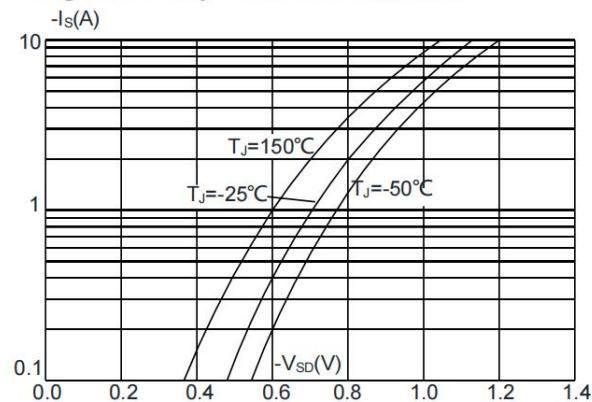


Figure 6: Capacitance Characteristics

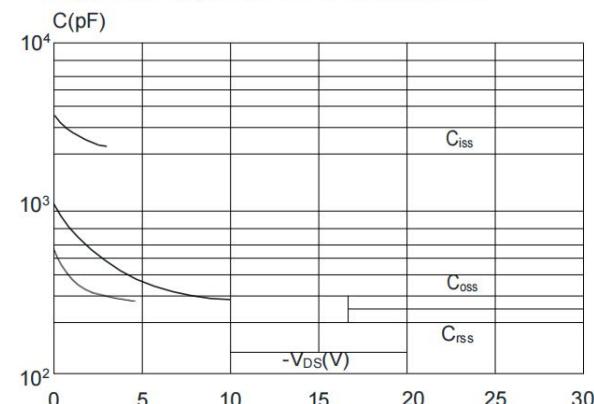


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

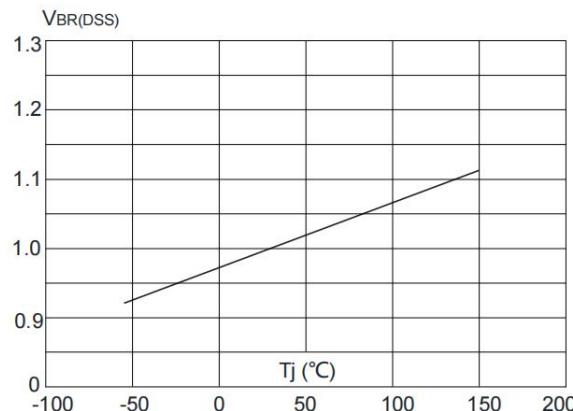


Figure 9: Maximum Safe Operating Area

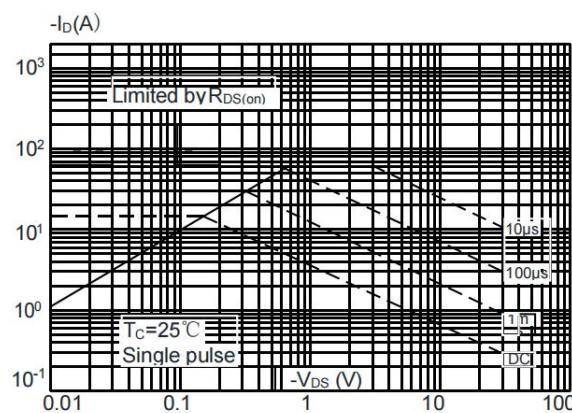


Figure 11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

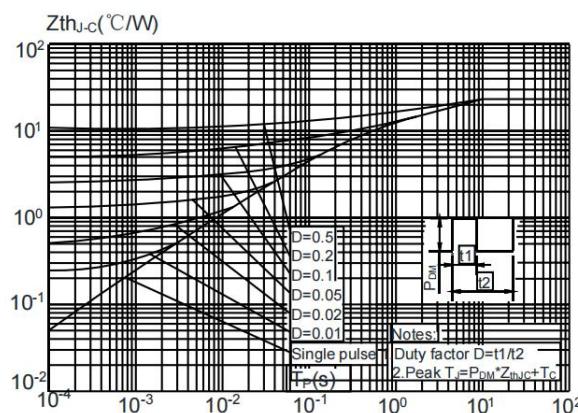


Figure 8: Normalized on Resistance vs. Junction Temperature



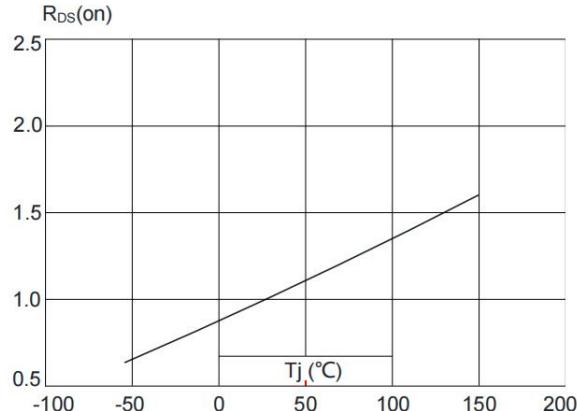


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature

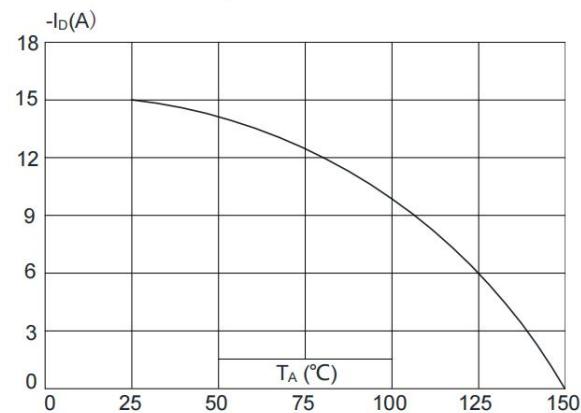

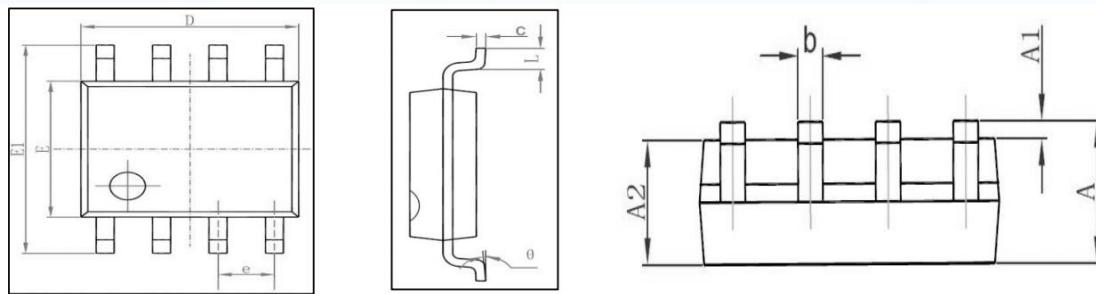

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.