

# EVVOSEMI<sup>®</sup>

THINK CHANGE DO



ESD




TVS




MOS



LDO



Diode



Sensor



DC-DC

## Product Specification

▶ Domestic	Part Number	1N4448W
▶ Overseas	Part Number	1N4448W
▶ Equivalent	Part Number	1N4448W

EV is the abbreviation of name EVVO

## FEATURES


- For surface mounted applications
- Fast reverse recovery time
- Ideal for automated placement

## MECHANICAL DATA

- Case: SOD-123W
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 16mg/0. 00056oz

## PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

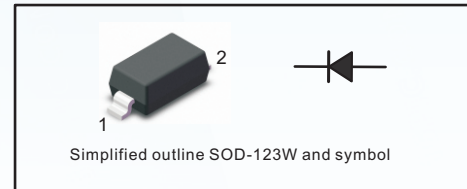

## Absolute Maximum Ratings at 25 °C


Parameter	Symbols	1N4448W	Units
Non-Repetitive Peak Reverse Voltage	$V_{RM}$	100	V
Peak Repetitive Reverse Voltage	$V_{RRM}$	75	V
Working Peak Reverse Voltage	$V_{RWM}$		
DC Reverse Voltage	$V_R$		
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Forward Continuous Current	$I_{FM}$	500	mA
Average Rectified Output Current	$I_O$	250	mA
Non-Repetitive Peak Forward Surge Current @t=1.0 μs @t=1.0 s	$I_{FSM}$	4.0 2.0	A
Power Dissipation	$P_d$	350	mW
Thermal Resistance Junction to Ambient Air	$R_{thJA}$	357	°C/W
Operating and Storage Temperature Range	$T_j, T_{stg}$	-65 ~ +150	°C

## Characteristics at $T_a = 25\text{ °C}$


Parameter	Symbols	1N4448W	Units
Reverse Breakdown Voltage at $I_R=1.0\mu A$	$V_{(BR)R}$	75(min)	V
Forward Voltage at 5 mA at 10 mA at 100 mA at 150 mA	$V_F$	0.62(min) 0.72(max) 0.855(max) 1.00(max) 1.25(max)	V
Peak Reverse Current at $V_R=75V$ at $V_R=20V$	$I_R$	2.5(max) 25(max)	μA nA
Typical Junction Capacitance f=1MHz, $V_R=0V$	$C_j$	4(max)	pF
Maximum Reverse Recovery Time <sup>(1)</sup>	$t_{rr}$	4	ns

(1) Measured with  $I_F=I_R=10mA, I_{rr}=0.1 \times I_R, R_L=100\Omega$


**Fig.1 Power Derating Curve**

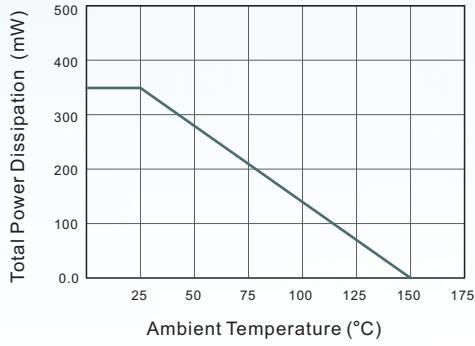


**Fig.2 Typical Reverse Characteristics**

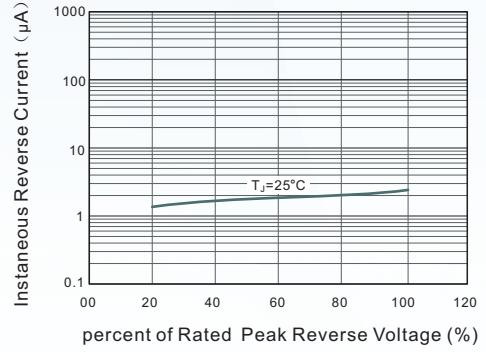

**Fig.3 Typical Instantaneous Forward Characteristics**

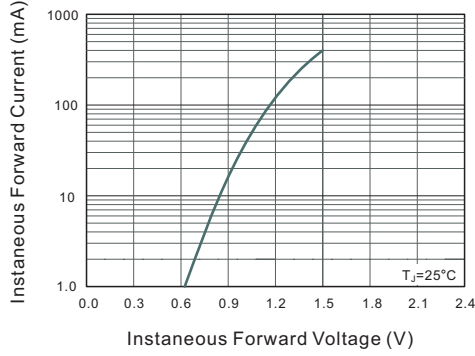

**Fig.4 Typical Junction Capacitance**

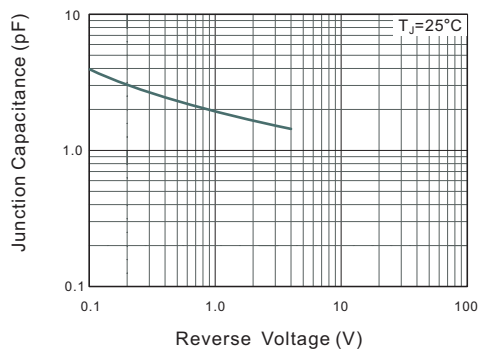

**PACKAGE OUTLINE**


Plastic surface mounted package; 2 leads

SOD-123W

SOD-123W mechanical data

UNIT		A	C	D	E	E <sub>1</sub>	L <sub>1</sub>	b	A <sub>1</sub>	∠
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	—	
mil	max	51	8.7	71	110	154	18	28	8	
	min	35	3.5	59	98	142	10	20	—	

**The recommended mounting pad size**

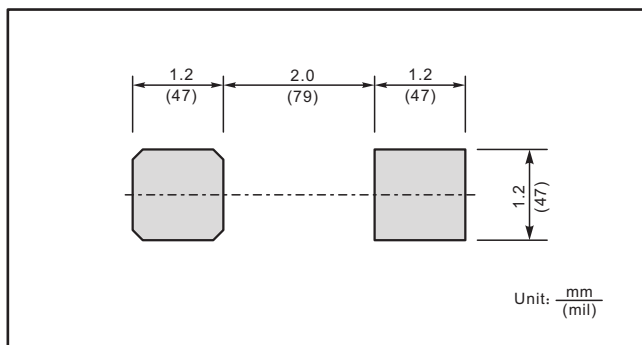

**Marking**

Type number	Marking code
1N4448W	T5

## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.