

EVVOSEMI[®]

THINK CHANGE DO



ESD




TVS




MOS



LDO



Diode



Sensor



DC-DC

Product Specification


▶ Domestic	Part Number	EV2SD2098-X-SB
▶ Overseas	Part Number	2SD2098-X
▶ Equivalent	Part Number	2SD2098-X

"SB" means SOT-89

EV is the abbreviation of name EVVO

FEATURES

- Low $V_{CE(sat)}$.
- Excellent DC current gain characteristics.
- Complements the 2SB1386

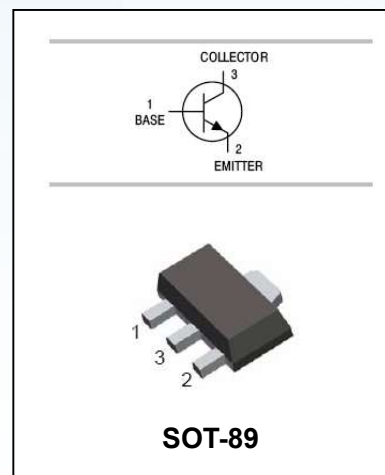

MAXIMUM RATING @ $T_a=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	20	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	5	A
P_C	Collector Dissipation	500	mW
T_j, T_{stg}	Junction and Storage Temperature	-55 to +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=50\mu A, I_E=0$	50			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	20			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=50\mu A, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=40V, I_E=0$			0.5	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			0.5	μA
DC current gain	h_{FE}	$V_{CE}=2V, I_C=0.5A$	120		390	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=4A, I_B=0.1A$		0.25	1.0	V
Transition frequency	f_T	$V_{CE}=6V, I_C=50mA,$ $f=100MHz$		150		MHz
Collector output capacitance	C_{ob}	$V_{CB}=20V, I_E=0, f=1MHz$		30		pF

CLASSIFICATION OF h_{FE}

Rank	EV2SD2098-Q-SB	EV2SD2098-R-SB
Range	120-270	180-390
MARKING	AHQ	AHR

TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

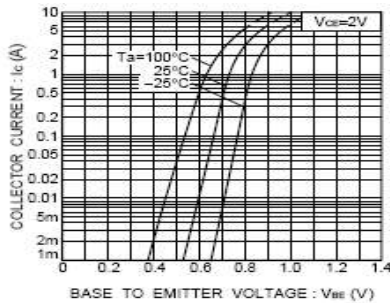


Fig.1 Grounded emitter propagation characteristics

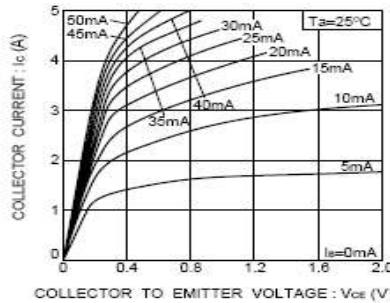


Fig.2 Grounded emitter output characteristics

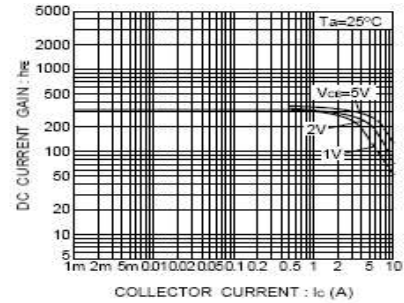


Fig.3 DC current gain vs. collector current (I)

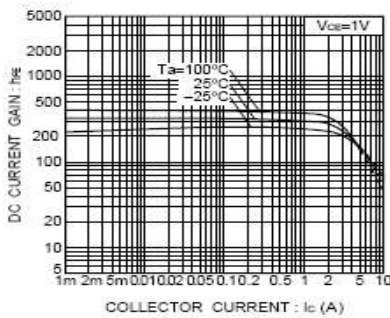


Fig.4 DC current gain vs. collector current (II)

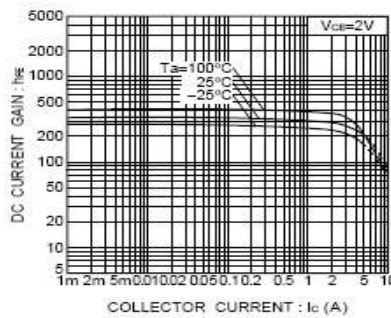


Fig.5 DC current gain vs. collector current (III)


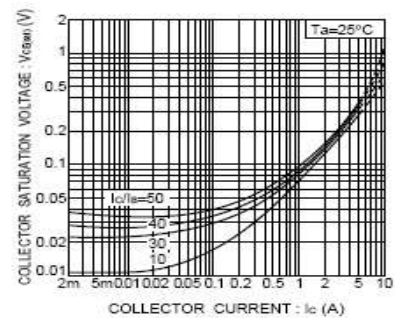


Fig.6 Collector-emitter saturation voltage vs. collector current (I)


PACKAGE OUTLINE

Plastic surface mounted package

SOT-89

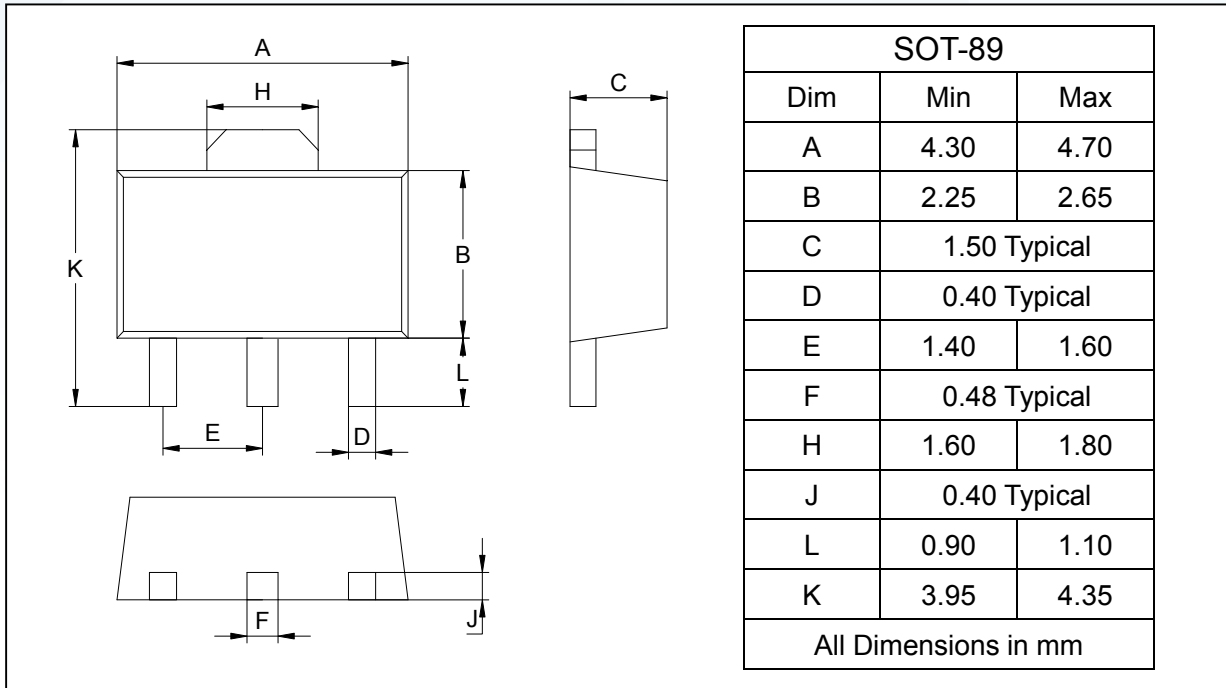

SOLDERING FOOTPRINT

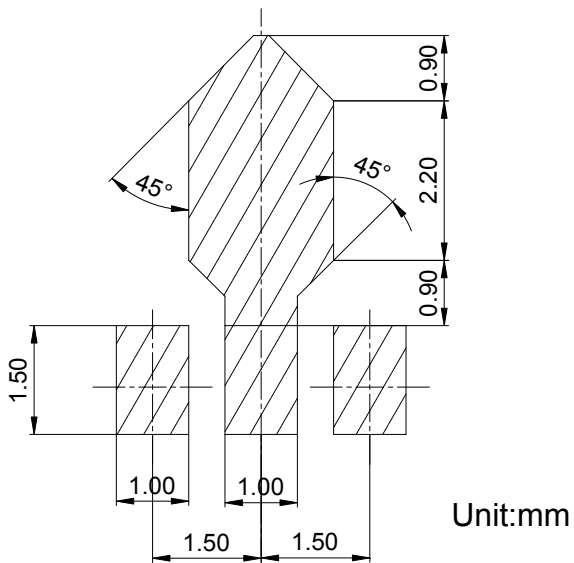

PACKAGE INFORMATION

Device	Package	Shipping
2SD2098	SOT-89	1000/Tape&Reel

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.