

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

| | | |
|--------------|-------------|------------|
| ▶ Domestic | Part Number | ABS1-ABS10 |
| ▶ Overseas | Part Number | ABS1-ABS10 |
| ▶ Equivalent | Part Number | ABS1-ABS10 |


EV is the abbreviation of name EVVO

FEATURES

- Ideal for printed circuit board
- Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed :
260°C / 10 seconds / 0.375" (9.5mm)
lead length at 5 lbs., (2.3 kg) tension

MECHANICAL DATA

- Case : Molded Plastic
- Epoxy : Device has UL flammability classification 94V-0
- Mounting Position : Any
- Marking : Type Number

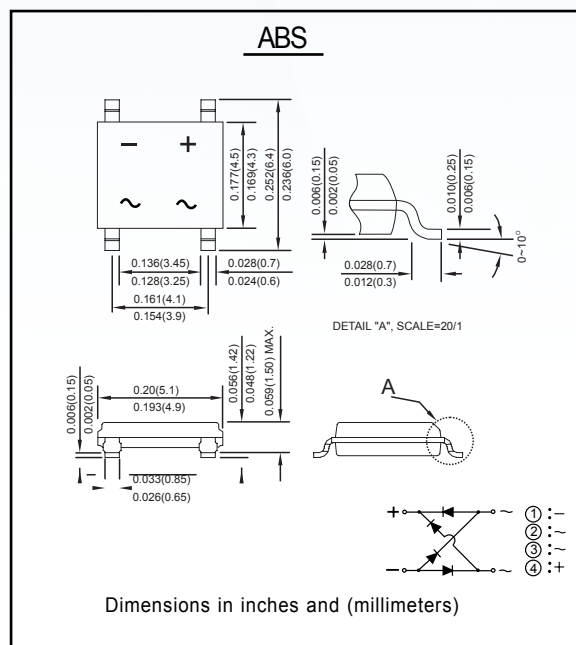

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| Characteristic | Symbol | ABS1 | ABS2 | ABS4 | ABS6 | ABS8 | ABS10 | Unit |
|---|--------------------------------------|-------------|------|------|------|------|-------|------------------|
| Peak Repetitive Reverse Voltage | V _{RRM} | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Working Peak Reverse Voltage | V _{RWM} | | | | | | | |
| DC Blocking Voltage | V _R | | | | | | | |
| RMS Reverse Voltage | V _{R(RMS)} | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Average Rectified Output Current -On glass-epoxy P.C.B. -On aluminum substrate | I _O | 0.8 1.0 | | | | | | A |
| Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | 30 | | | | | | A |
| I ² t Rating for Fusing (t < 8.3ms) | I ² t | 10 | | | | | | A ² s |
| Forward Voltage per element @I _F = 0.4A | V _{FM} | 0.95 | | | | | | V |
| Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 125°C | I _{RM} | 10 150 | | | | | | μA |
| Typical Junction Capacitance per leg (Note 2) | C _j | 25 | | | | | | pF |
| Typical Thermal Resistance per leg (Note 1) | R _{θJA} R _{θJL} | 62.5 25 | | | | | | °C/W |
| Operating and Storage Temperature Range | T _J , T _{STG} | -55 to +150 | | | | | | °C |

Note: 1. On aluminum substrate P.C.B. with an area of 0.8×0.8"(20×20mm) mounted on 0.05×0.05"(1.3×1.3mm) solder pad.
2. On glass epoxy P.C.B. mounted on 0.05×0.05"(1.3×1.3mm) pads.

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

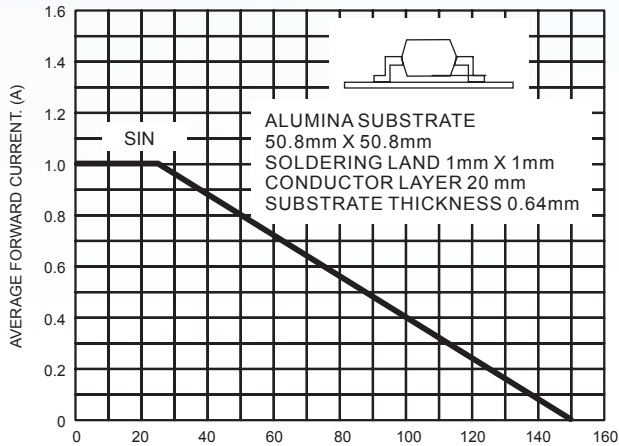


FIG.2- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

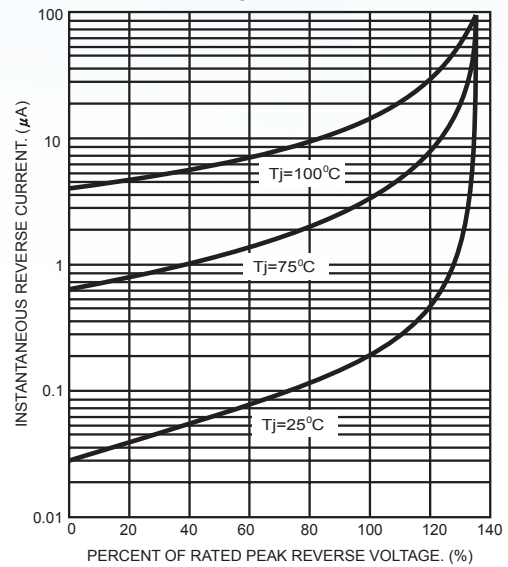


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

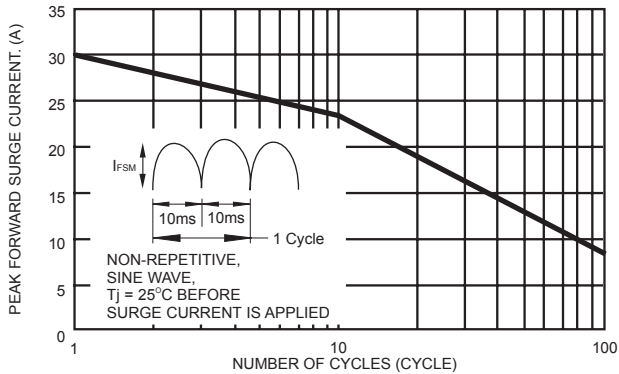


FIG.4- TYPICAL JUNCTION CAPACITANCE


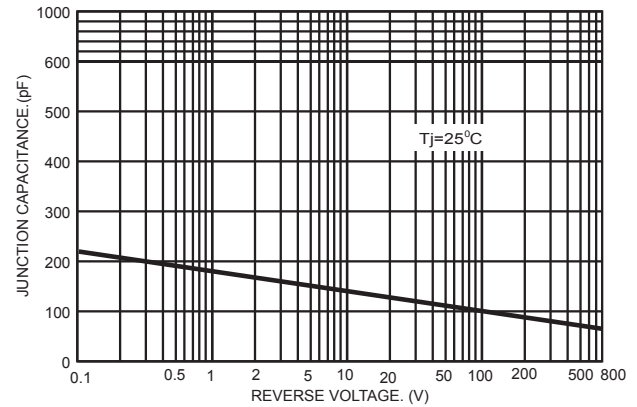


FIG.5- TYPICAL FORWARD CHARACTERISTICS

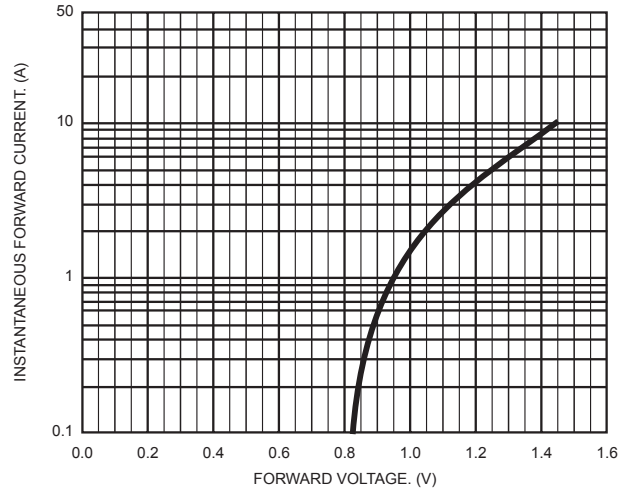

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.