

EVVOSEMI®

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	KBL4/RS4L/KBL6 Series
▶ Overseas	Part Number	KBL4/RS4L/KBL6 Series
▶ Equivalent	Part Number	KBL4/RS4L/KBL6 Series

EV is the abbreviation of name EVVO


KBL4/RS4L/KBL6 SERIES

SINGLE PHASE 4.0/6.0 AMPS. SILICON BRIDGE RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
4.0/6.0 Amperes

FEATURES

- UL Recognized File # E-230084
- Surge overload rating - 200 amperes peak
- Ideal for printed circuit board
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Mounting Position: Any

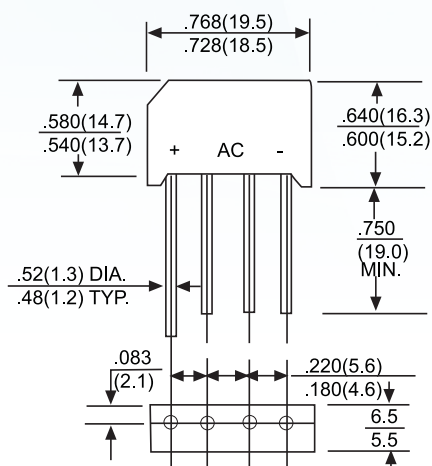





MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 50Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number		KBL6005	KBL601	KBL602	KBL604	KBL606	KBL608	KBL610	UNITS
		RS401L	RS402L	RS403L	RS404L	RS405L	RS406L	RS407L	
		KBL4005	KBL401	KBL402	KBL404	KBL406	KBL408	KBL410	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current @ T _A =50°C T _A (Note 1)	KBL4 KBL6 I _{F(AV)}	4.0 6.0							A
Peak Forward Surge Current, 8.3ms single half sine-wave super imposed on rated load	KBL4 KBL6 I _{FSM}	150 200							A
Maximum DC Reverse Voltage Drop Per Leg	KBL4@4.0A KBL6@6.0A V _F	1.0 1.05							V
Maximum Reverse Current at Rated DC Blocking Voltage	T _A =25°C T _A =100°C I _R	10.0 500							uA
Operating and Storage Temperature Range T _A	T _J , T _{STG}	-55 to +150							°C

NOTES: 1. Mounting conditions, 0.5" lead length maximum.

RATING AND CHARACTERISTIC CURVES
KBL4/RS4L/KBL6 SERIES

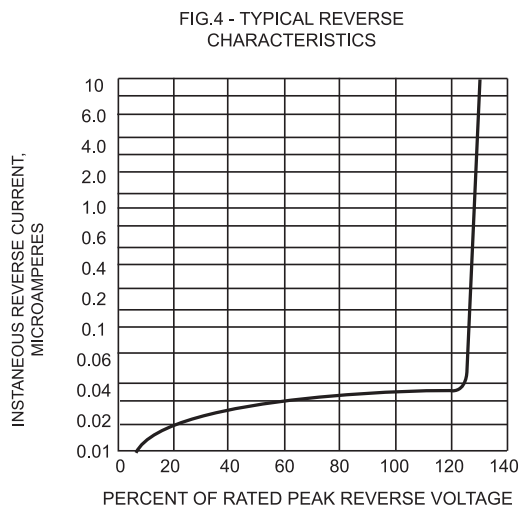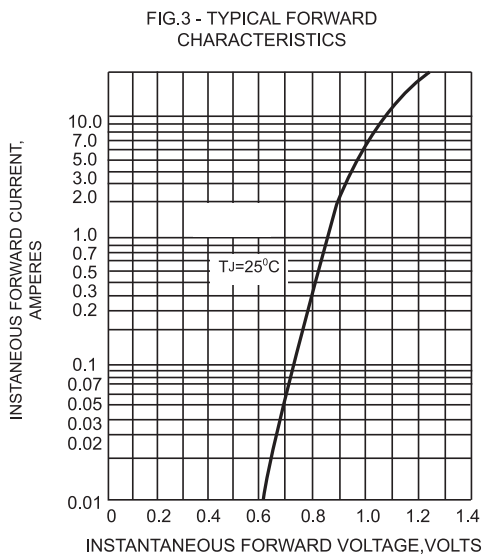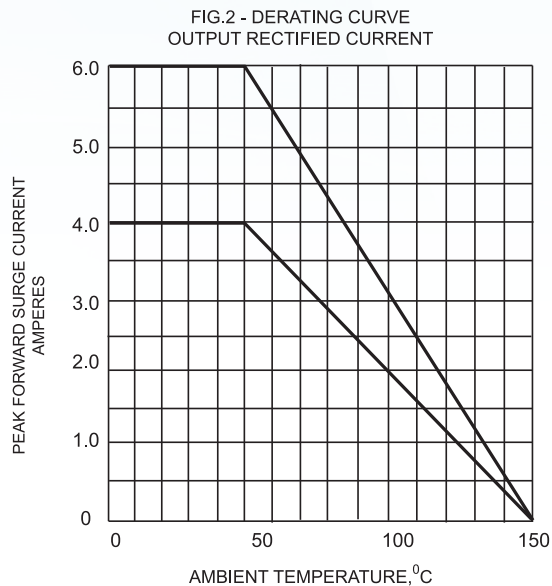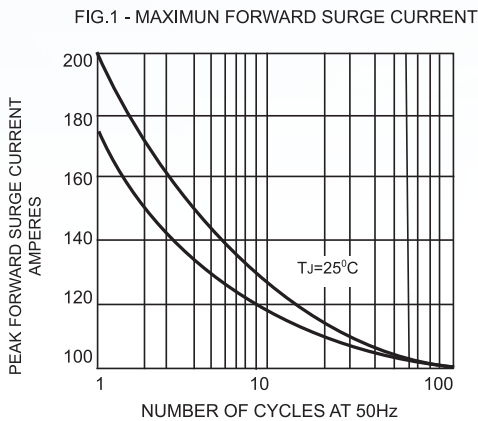

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.