

EVVOSEMI[®]

THINK CHANGE DO



ESD




TVS




MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	GBJ/KBJ25005 THRU GBJ/KBJ2510
▶ Overseas	Part Number	GBJ/KBJ25005 THRU GBJ/KBJ2510
▶ Equivalent	Part Number	GBJ/KBJ25005 THRU GBJ/KBJ2510

EV is the abbreviation of name EVVO


GBJ/KBJ25005 THRU GBJ/KBJ2510

SINGLE PHASE 25AMPS. GLASS PASSIVATED BRIDGE RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
25 Amperes

FEATURES

- UL Recognized File # E-230084
- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- The Plastic material has UL flammability classification 94 V-0

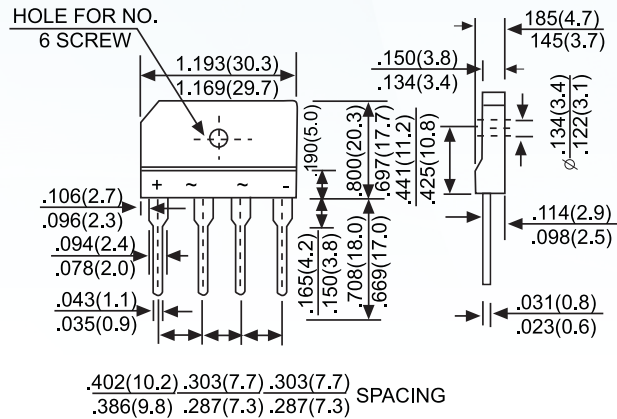

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 50Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number		GBJ KBJ 25005	GBJ KBJ 2501	GBJ KBJ 2502	GBJ KBJ 2504	GBJ KBJ 2506	GBJ KBJ 2508	GBJ KBJ 2510	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward (with heatsink Note 2) Rectified Current@T _c = 100 °C (without heatsink)	I _{F(AV)}	25.0 4.2							A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	I _{FSM}	350							A
Maximum Instantaneous Forward Voltage Drop Per Leg @12.5A	V _F	1.05							V
Maximun DC Reverse Current at Rated DC Blocking Voltage	I _R	10 500							uA
I ² t Rating for fusing (t<8.3ms)	I ² t	510							A ² S
Typical Junction Capacitance per Leg (Note 1)	C _J	85							pF
Typical Thermal Resistance(Note 2)	R _{θJC}	0.6							°C/W
Operating Temperature Range	T _J	-55 to+150							°C
Storage Temperature Range	T _{STG}	-55 to+150							°C

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 2.Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

RATING AND CHARACTERISTIC CURVES

GBJ/KBJ25005 THRU GBJ/KBJ2510

FIG.1 - FORWARD CURRENT DERATING CURVE

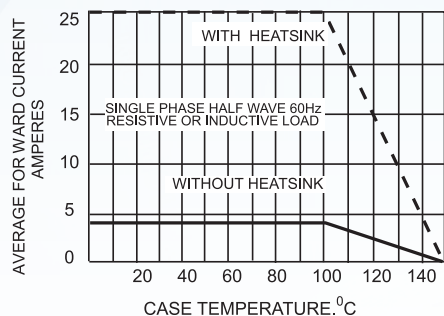
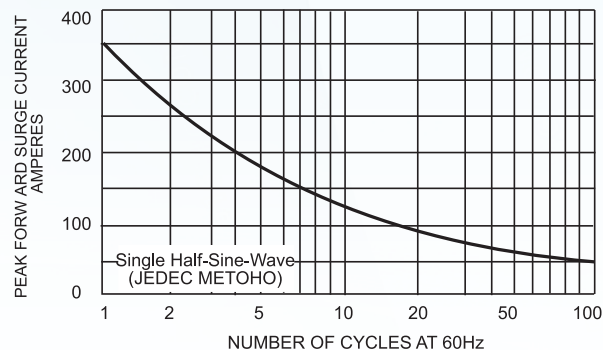
FIG.2-MAXIMUM NON-REPETITIVE
SURGE CURRENT

FIG.3 - TYPICAL JUNCTION CAPACITANCE

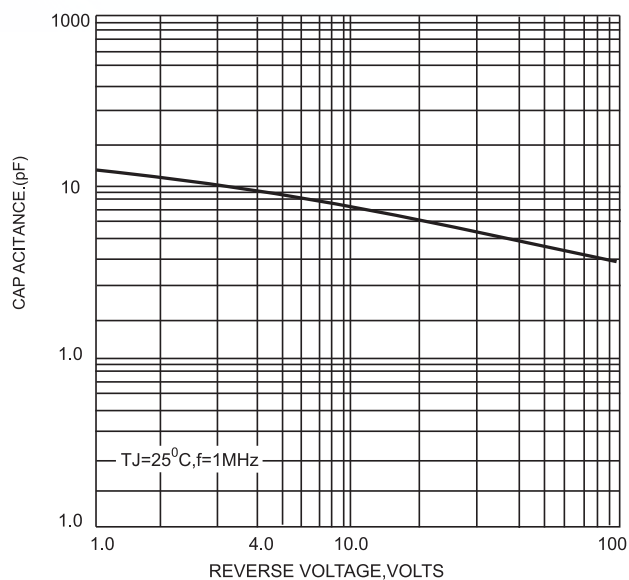


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


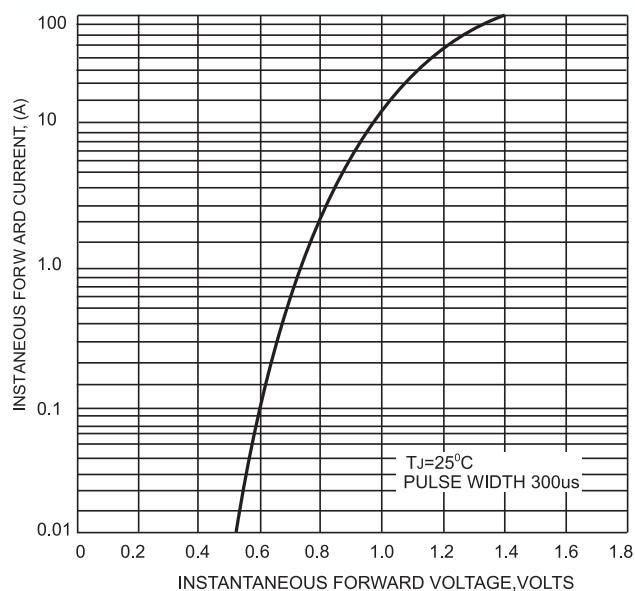


FIG.5-TYPICAL REVERSE CHARACTERISTICS

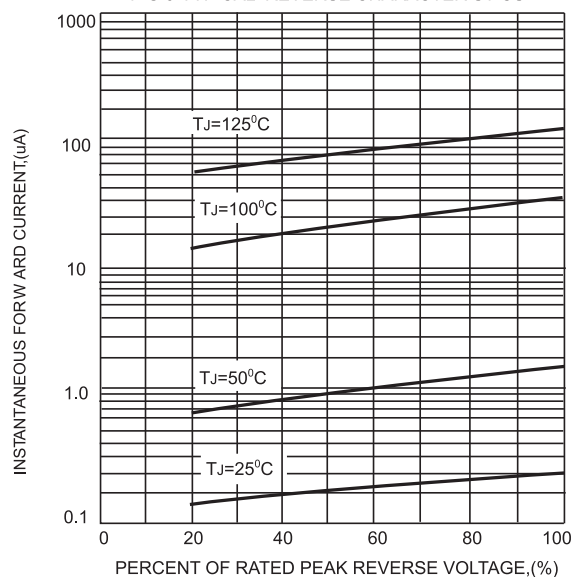

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.