

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	74HC373D
▶ Overseas	Part Number	74HC373D
▶ Equivalent	Part Number	74HC373D

EV is the abbreviation of name EVVO

Octal D-type transparent latch; 3-state

Description

The 74HC373D is a high-speed Si-gate CMOS device and is pin compatible with Low-power Schottky TTL. It is specified in compliance with JEDEC standard no. 7A


Features

- 3-state non-inverting outputs for bus oriented applications
- Common 3-state output enable input
- Functionally identical to 74HC573D ESD protection:

Applications

- 3-state non-inverting outputs for bus oriented applications
- Common 3-state output enable input
- Functionally identical

Functional diagram

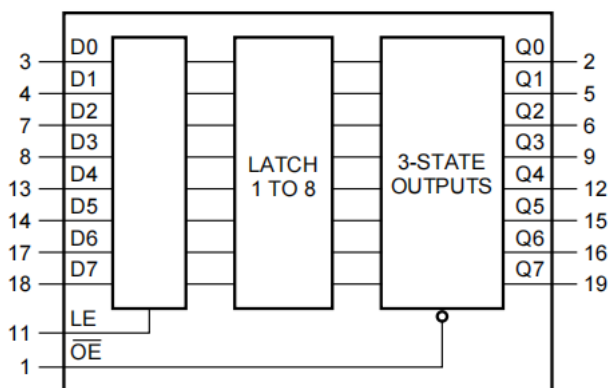


Absolute Maximum Ratings

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+7	V
I_{IK}	input clamping current	$V_I < -0.5\text{ V}$ or $V_I > V_{CC} + 0.5\text{ V}$	-	± 20	mA
I_{OK}	output clamping current	$V_O < -0.5\text{ V}$ or $V_O > V_{CC} + 0.5\text{ V}$	-	± 20	mA
I_O	output current	$V_O = -0.5\text{ V}$ to $(V_{CC} + 0.5\text{ V})$	-	± 35	mA
I_{CC}	supply current		-	+70	mA
I_{GND}	ground current		-	-70	mA
T_{stg}	storage temperature		-65	+150	°C
P_{tot}	total power dissipation				

Recommended Operating Conditions


Symbol	Parameter	Conditions	Min	Typ	Max
V_{CC}	supply voltage		2.0	5.0	6.0
V_I	input voltage		0	-	V_{CC}
V_O	output voltage		0	-	V_{CC}
T_{amb}	ambient temperature		-40	+25	+125
$\Delta t/\Delta V$	input transition rise and fall rate	$V_{CC} = 2.0\text{ V}$	-	-	625
		$V_{CC} = 6.0\text{ V}$	-	-	83

Waveforms

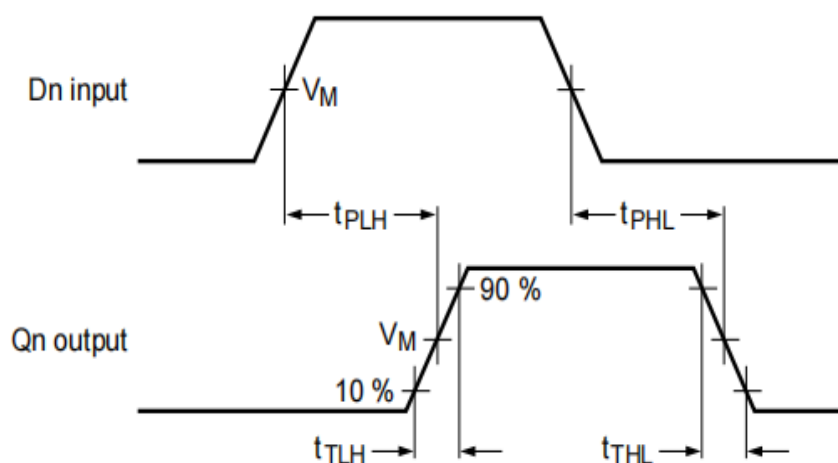


PIN DATA

DIP20

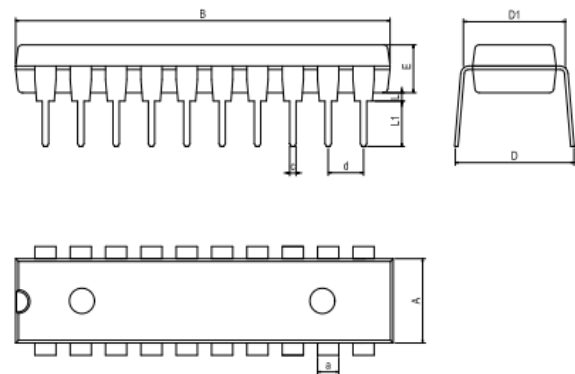

Dimensions In Millimeters(DIP20)										
Symbol:	A	B	D	D1	E	L	L1	a	c	d
Min:	6.10	24.95	8.40	7.42	3.10	0.50	3.00	1.50	0.40	2.54 BSC
Max:	6.68	26.55	9.00	7.82	3.55	0.70	3.60	1.55	0.50	

SOP20

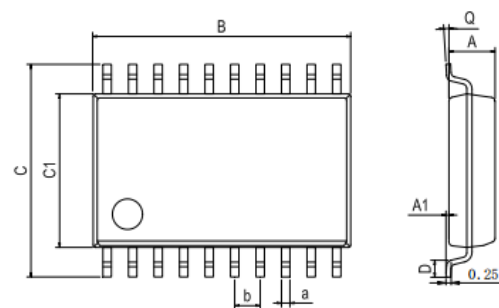

Dimensions In Millimeters(SOP20L)										
Symbol:	A	A1	B	C	C1	D	Q	a	b	
Min:	2.10	0.05	12.50	10.21	7.40	0.45	0	0.35		1.27 BSC
Max:	2.50	0.25	13.00	10.61	7.60	1.25	8	0.45		

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.