

EVVOSEMI[®]

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

| | | |
|--------------|-------------|--------------|
| ▶ Domestic | Part Number | EVBAT1000-S1 |
| ▶ Overseas | Part Number | BAT1000 |
| ▶ Equivalent | Part Number | BAT1000 |

"S1" means SOT-23

EV is the abbreviation of name EVVO

Features


- Very Low Forward Voltage Drop
- High Conductance
- For Use in DC-DC Converter, PCMCIA, and Mobile Telecommunications Applications
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 and 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**



Top View

Mechanical Data

- Case: SOT23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish annealed over Alloy 42 leadframe (Lead Free Plating). Solderable per MIL-STD-202, Method 208 (e3)
- Polarity: See Diagram
- Weight: 0.008 grams (approximate)




Schematic and Pin Configuration

Ordering Information (Note 5)

1A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

| Part Number | Compliance | Case | Packaging |
|---------------------|------------|-------|------------------|
| EVBAT1000-S1(-7-F) | | SOT23 | 3000/Tape & Reel |
| EVBAT1000Q-S1(-7-F) | | SOT23 | 3000/Tape & Reel |

Marking Information



K79 = Product Type Marking Code
YM = Date Code Marking

Date Code Key

Date Code Key

| Year | 2002 | 2003 | 2004 | | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | | X | Y | Z | A | B | C | D |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitance load, derate current by 20%.

| Characteristic | Symbol | Value | Unit |
|---|--|-------|------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V _{RRM} V _{RWM} V _R | 40 | V |
| RMS Reverse Voltage | V _{R(RMS)} | 28 | V |
| Average Rectified Current | I _O | 1.0 | A |
| Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load | I _{FSM} | 5.5 | A |

Thermal Characteristics

| Characteristic | Symbol | Value | Unit |
|--|------------------|-------------|------|
| Power Dissipation (Note 6) | P _D | 500 | mW |
| Typical Thermal Resistance, Junction to Ambient Air (Note 6) | R _{θJA} | 200 | °C/W |
| Operating Temperature Range | T _J | -40 to +125 | °C |
| Storage Temperature Range | T _{STG} | -40 to +150 | °C |

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|------------------------------------|--------------------|-----|---|---|----------|---|
| Reverse Breakdown Voltage (Note 7) | V _{(BR)R} | 40 | — | — | V | I _R = 300μA |
| Forward Voltage | V _F | — | 225 235 290 340 390 420 475 | 270 290 340 400 450 500 600 | mV | I _F = 50mA I _F = 100mA I _F = 250mA I _F = 500mA I _F = 750mA I _F = 1000mA I _F = 1500mA |
| Reverse Current (Note 7) | I _R | — | — | 100 | μA | V _R = 30V |
| Total Capacitance | C _T | — | 175 25 | — | pF pF | V _R = 0V, f = 1.0MHz V _R = 25V, f = 1.0MHz |

Notes: 6. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com>.
 7. Short duration pulse test used to minimize self-heating effect.

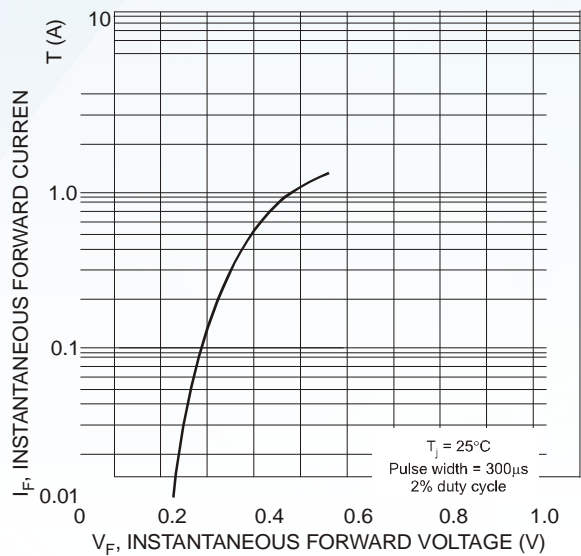


Fig. 1 Typical Forward Characteristics

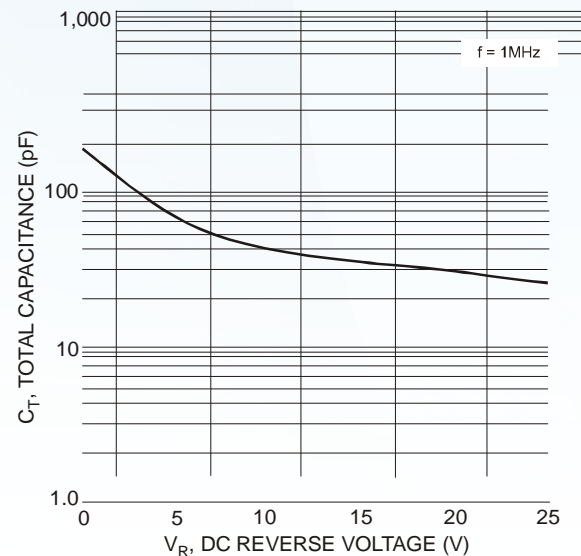


Fig. 2 Total Capacitance vs. Reverse Voltage

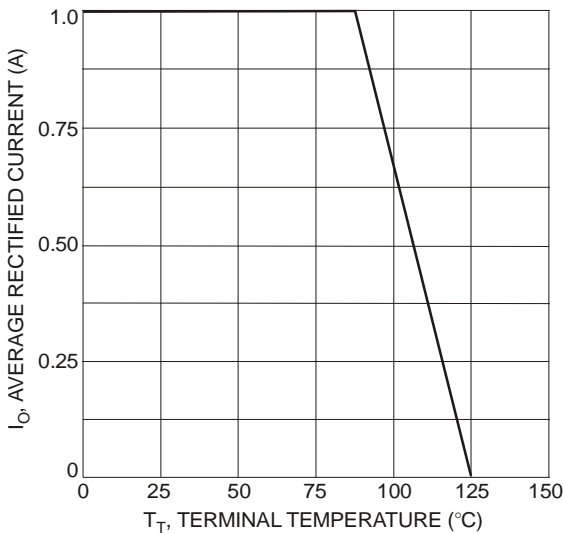


Fig. 3 Forward Current Derating Curve


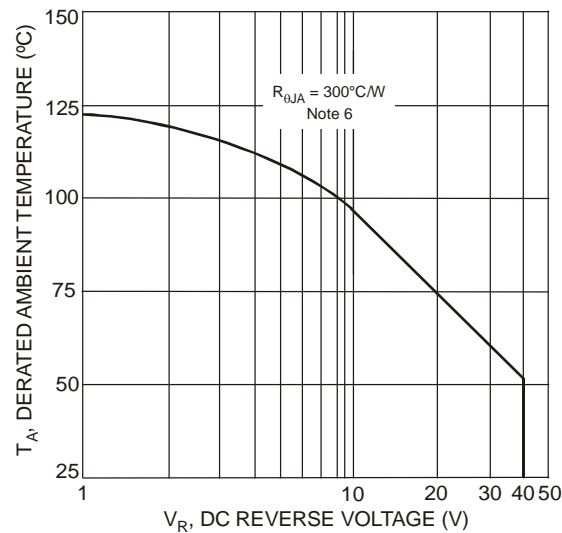


Fig. 4 Operating Temperature Derating


Note: 8. Assumed application thermal conditions. $R_{\theta JA}$ varies depending on application.

Package Outline Dimensions

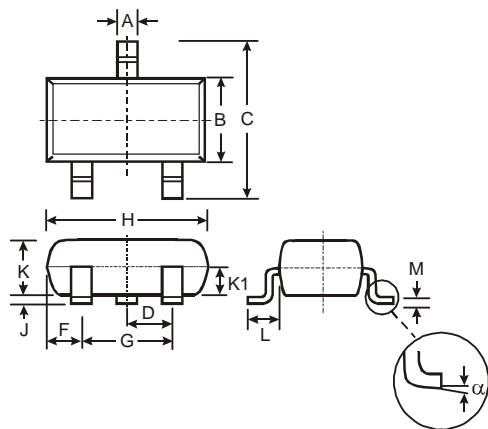

| SOT23 | | | |
|----------------------|-------|------|-------|
| Dim | Min | Max | Typ |
| A | 0.37 | 0.51 | 0.40 |
| B | 1.20 | 1.40 | 1.30 |
| C | 2.30 | 2.50 | 2.40 |
| D | 0.89 | 1.03 | 0.915 |
| F | 0.45 | 0.60 | 0.535 |
| G | 1.78 | 2.05 | 1.83 |
| H | 2.80 | 3.00 | 2.90 |
| J | 0.013 | 0.10 | 0.05 |
| K | 0.903 | 1.10 | 1.00 |
| K1 | - | - | 0.400 |
| L | 0.45 | 0.61 | 0.55 |
| M | 0.085 | 0.18 | 0.11 |
| α | 0° | 8° | - |
| All Dimensions in mm | | | |

Suggested Pad Layout

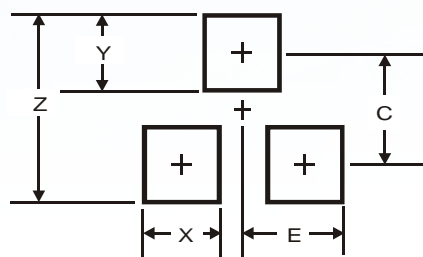

| Dimensions | Value (in mm) |
|------------|---------------|
| Z | 2.9 |
| X | 0.8 |
| Y | 0.9 |
| C | 2.0 |
| E | 1.35 |

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.