


SS52C - SS520C

■ Surface Mount Schottky Barrier Rectifier

■ Features

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

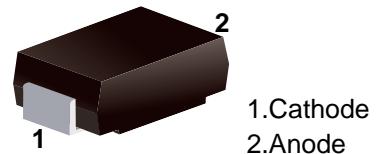

■ Simplified outline(SMC)

Top View

■ Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	SS52C	SS54C	SS56C	SS58C	SS510C	SS512C	SS515C	SS520C	Units				
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	60	80	100	120	150	200	V				
Maximum RMS voltage	V_{RMS}	14	28	42	56	70	84	105	140	V				
Maximum DC Blocking Voltage	V_{DC}	20	40	60	80	100	120	150	200	V				
Maximum Average Forward Rectified Current	$I_{F(AV)}$	5.0							A					
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	175				150				A				
Max Instantaneous Forward Voltage at 5 A	V_F	0.45	0.55	0.70	0.85				A	V				
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Reverse Voltage $T_a = 100^\circ C$	I_R	1.0 50				mA				mA				
Typical Junction Capacitance ⁽¹⁾	C_J	600		400				pF						
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$	35							°C/W					
Operating Junction Temperature Range	T_j	-55 ~ +150							°C					
Storage Temperature Range	T_{stg}	-55 ~ +150							°C					

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Fig.1 Forward Current Derating Curve

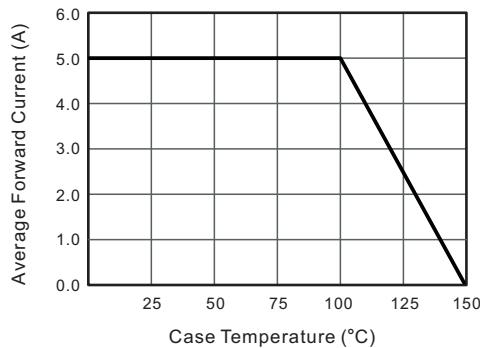


Fig.2 Typical Reverse Characteristics

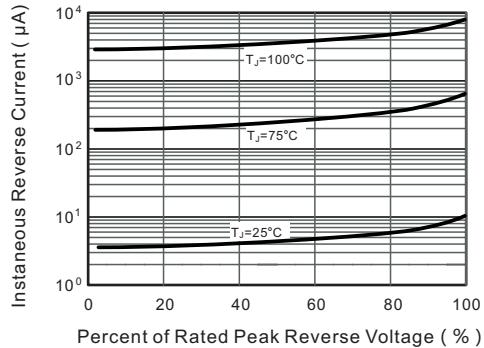


Fig.3 Typical Forward Characteristic

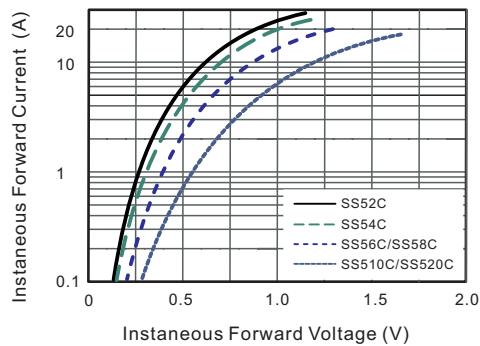


Fig.4 Typical Junction Capacitance

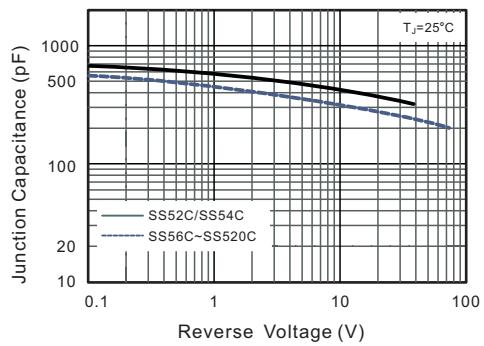


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current



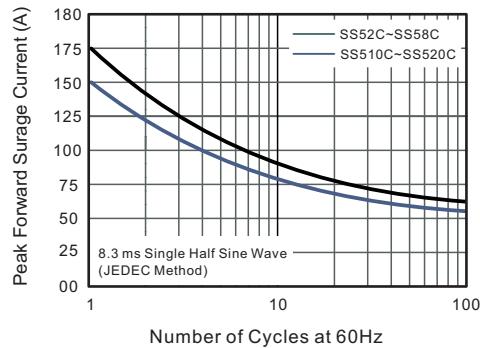


Fig.6- Typical Transient Thermal Impedance

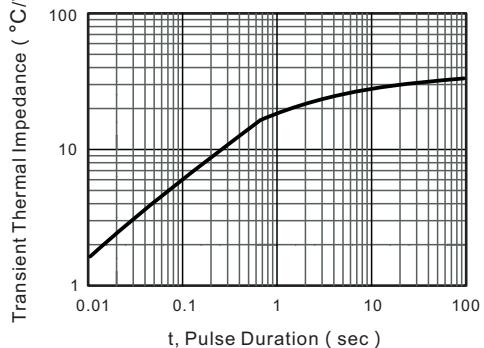

■ SMC

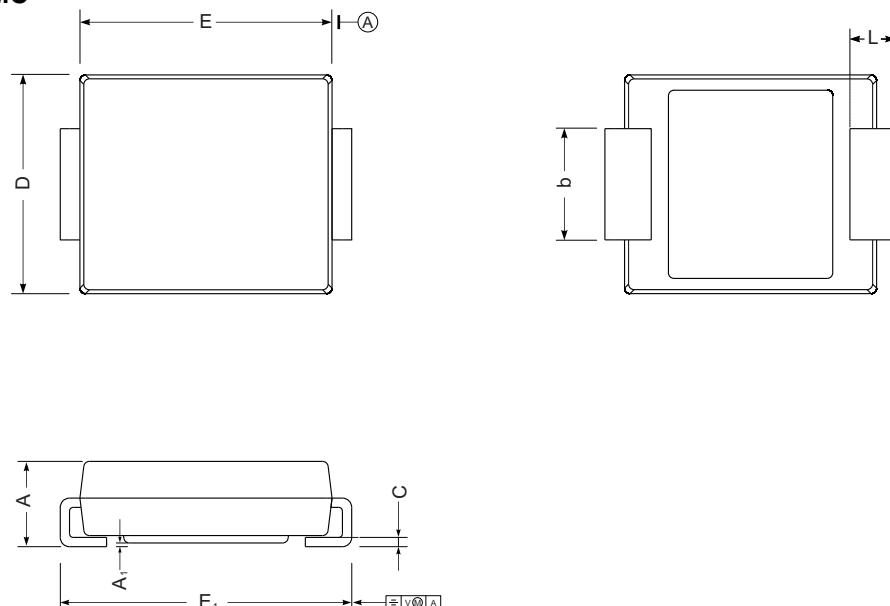

SMC mechanical data

UNIT		A	E	D	E ₁	A ₁	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

The recommended mounting pad size

