

# EVVOSEMI<sup>®</sup>

THINK CHANGE DO



ESD



TVS



MOS



LDO



Diode



Sensor



DC-DC


## Product Specification

▶ Domestic	Part Number	MMBT2907A
▶ Overseas	Part Number	MMBT2907A
▶ Equivalent	Part Number	MMBT2907A

EV is the abbreviation of name EVVO

**MMBT2907A**  
**PNP TRANSISTOR**
**FEATURES**

- Epitaxial planar die construction
- Complementary NPN Type available(MMBT2222A)

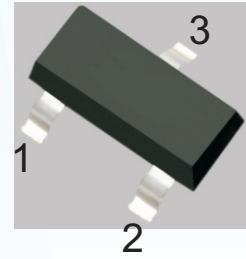**SOT-23**
 1.BASE  
 2.EMITTER  
 3.COLLECTOR
**MAXIMUM RATINGS (Ta=25°C unless otherwise noted)**

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$V_{CBO}$	-60	V
Collector-Emitter Voltage	$V_{CEO}$	-60	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current — Continuous	$I_C$	-600	mA
Total Device Dissipation	$P_D$	250	mW
Thermal Resistance From Junction To Ambient	$R_{thJA}$	500	°C/W
Operation Junction and Storage Temperature Range	$T_J, T_{stg}$	-55~+150	°C








**ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted.)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-60			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = 0$	-5			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = -50V, I_E = 0$			-20	nA
Base cut-off current	$I_{EBO}$	$V_{EB} = -3V, I_C = 0$			-10	nA
Collector cut-off current	$I_{CEX}$	$V_{CE} = -30V, V_{BE} = -0.5V$			-50	nA
DC current gain	$h_{FE1}$	$V_{CE} = -10V, I_C = -150mA$	100		300	
	$h_{FE2}$	$V_{CE} = -10V, I_C = -0.1mA$	75			
	$h_{FE3}$	$V_{CE} = -10V, I_C = -1mA$	100			
	$h_{FE4}$	$V_{CE} = -10V, I_C = -10mA$	100			
	$h_{FE5}$	$V_{CE} = -10V, I_C = -500mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -150mA, I_B = -15mA$			-0.4	V
	$V_{CE(sat)}$	$I_C = -500mA, I_B = -50mA$			-1.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -150mA, I_B = -15mA$			-1.3	V
	$V_{BE(sat)}$	$I_C = -500mA, I_B = -50mA$			-2.6	V
Transition frequency	$f_T$	$V_{CE} = -20V, I_C = -50mA, f = 100MHz$	200			MHz
Delay time	$t_d$	$V_{CE} = -30V,$			10	ns
Rise time	$t_r$	$I_C = -150mA, I_{B1} = -15mA$			25	ns
Storage time	$t_s$	$V_{CE} = -6V, I_C = -150mA$			225	ns
Fall time	$t_f$	$I_{B1} = -I_{B2} = -15mA$			60	ns


**CLASSIFICATION OF  $h_{FE(1)}$** 

HFE	100-300	
RANK	L	H
RANGE	100-200	200-300


TYPICAL CHARACTERISTICS

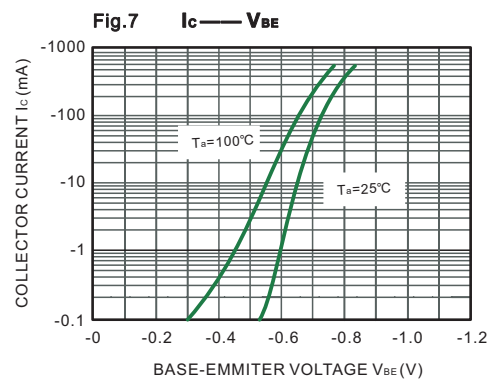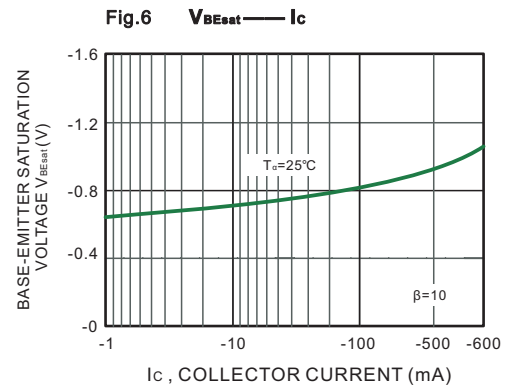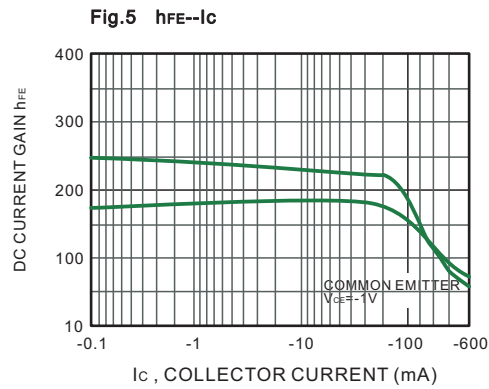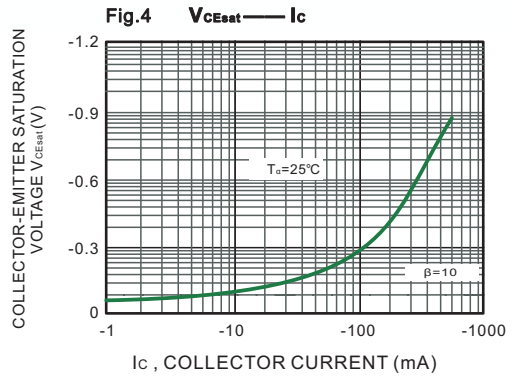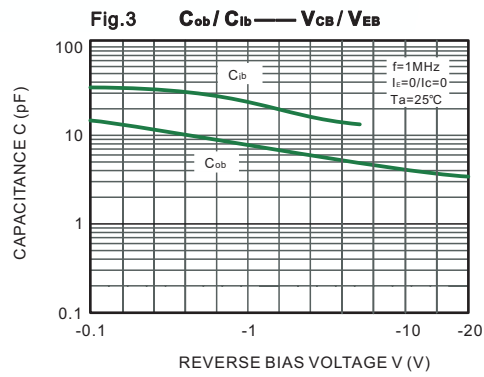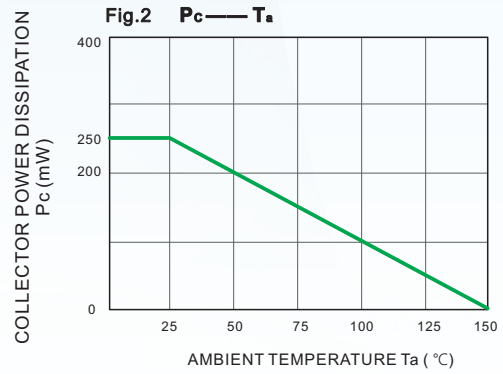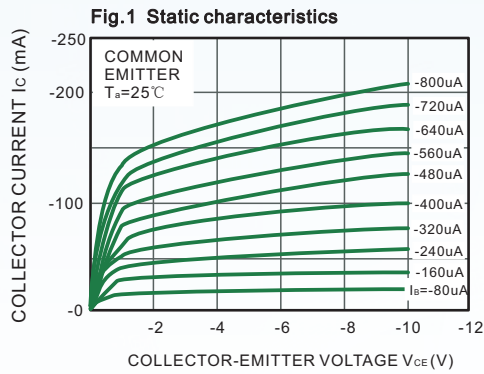

**SOT-23 Package Outline Dimensions**

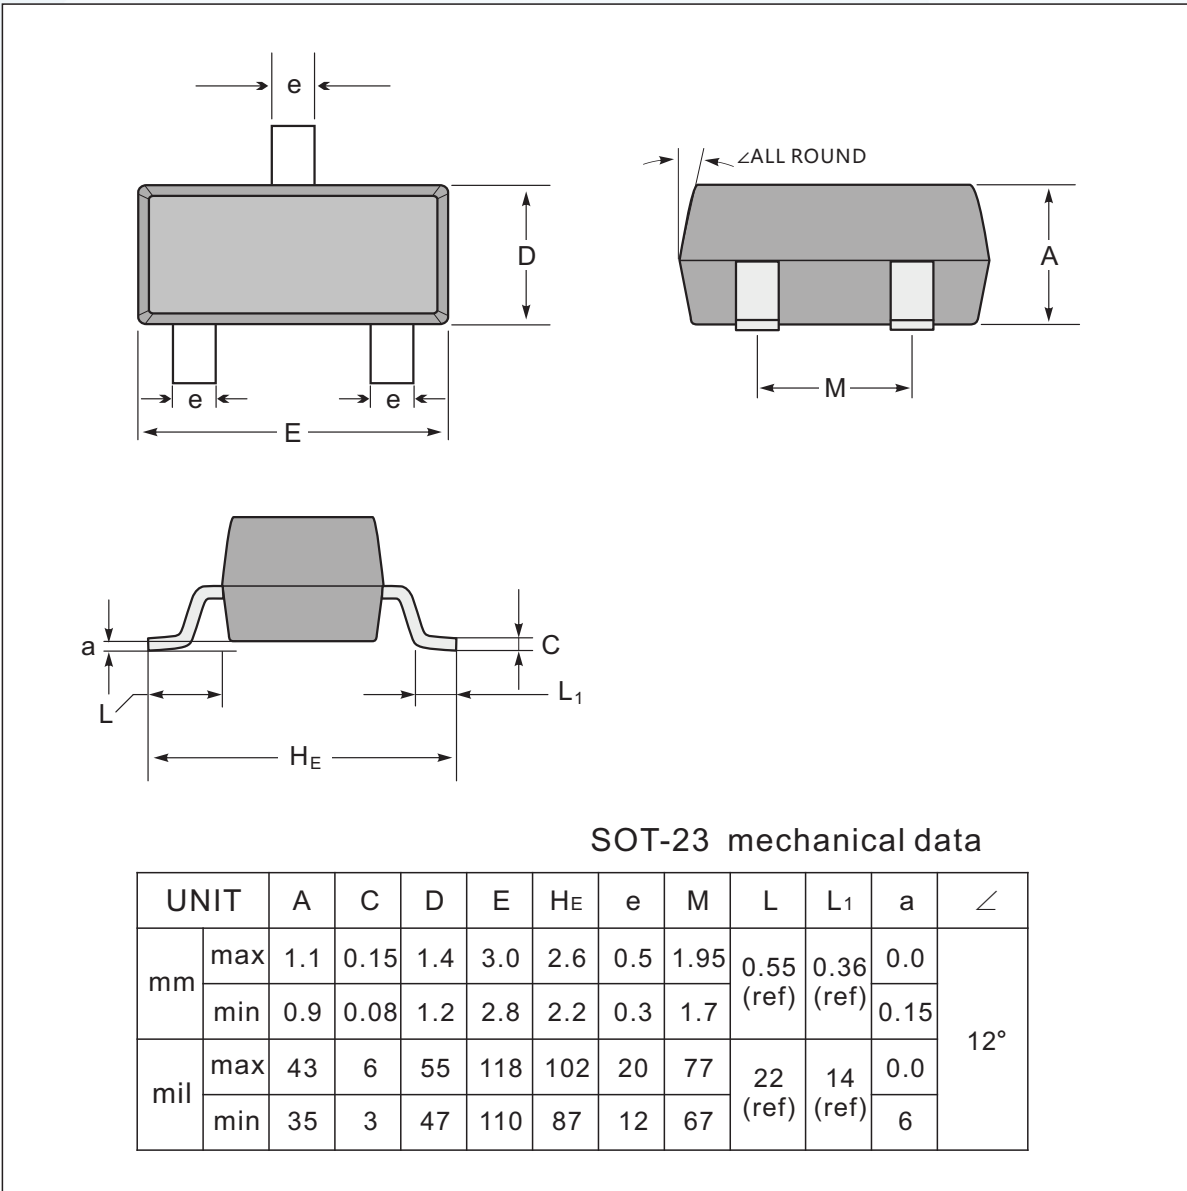

**The recommended mounting pad size**

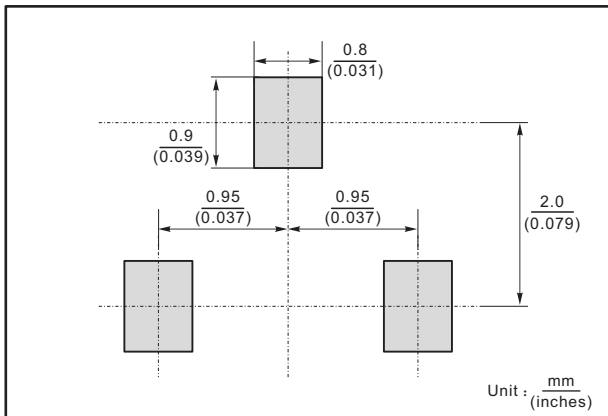


**Marking**


Type number	Marking code
MMBT2907A	2F

## SOT-23 Packing

1. The method of packaging and dimension are shown as below figure. (Dimension in mm)

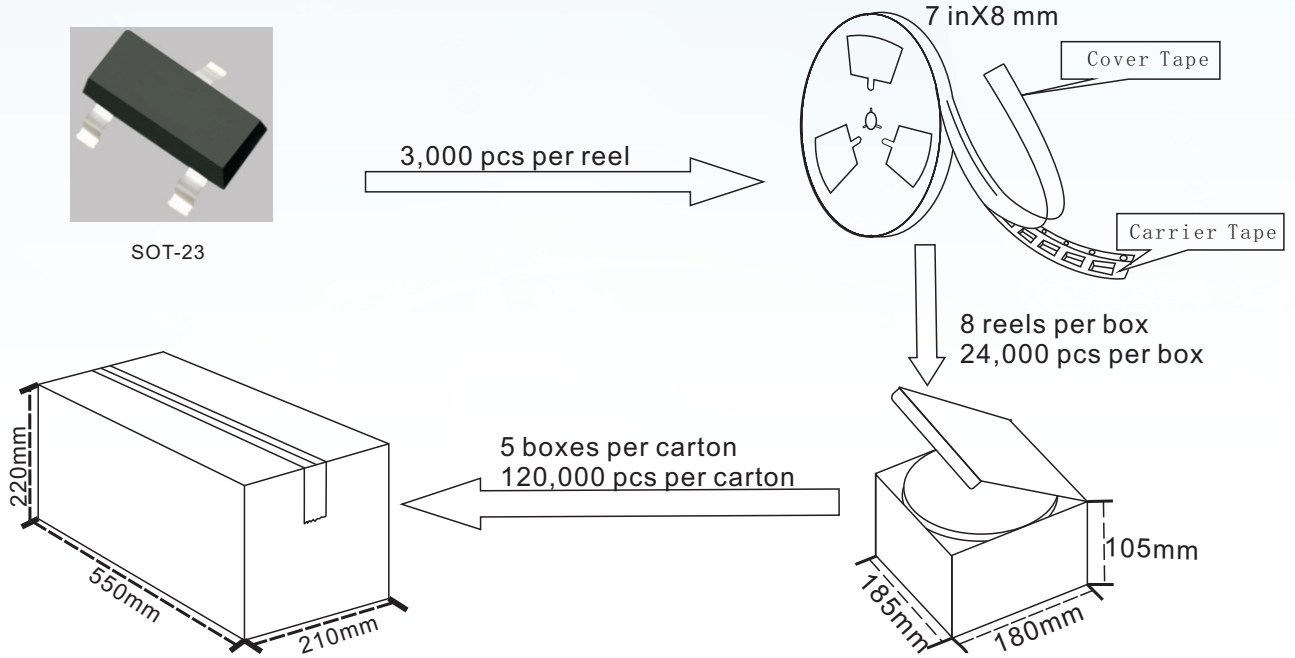


### SOT-23 Embossed Carrier Tape

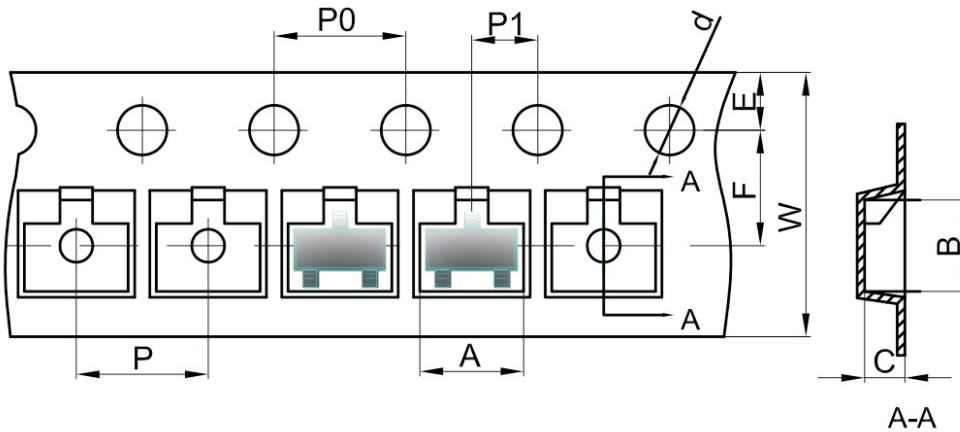

Dimensions are in millimeter

Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

### SOT-23 Tape Leader and Trailer

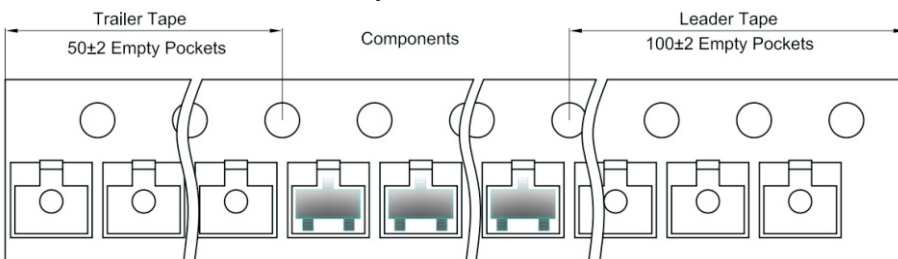



## Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.